


**WEST LAKE**  
PREMIUM TIRES

ZC-RUBBER PRODUCT



www.zc-rubber.com

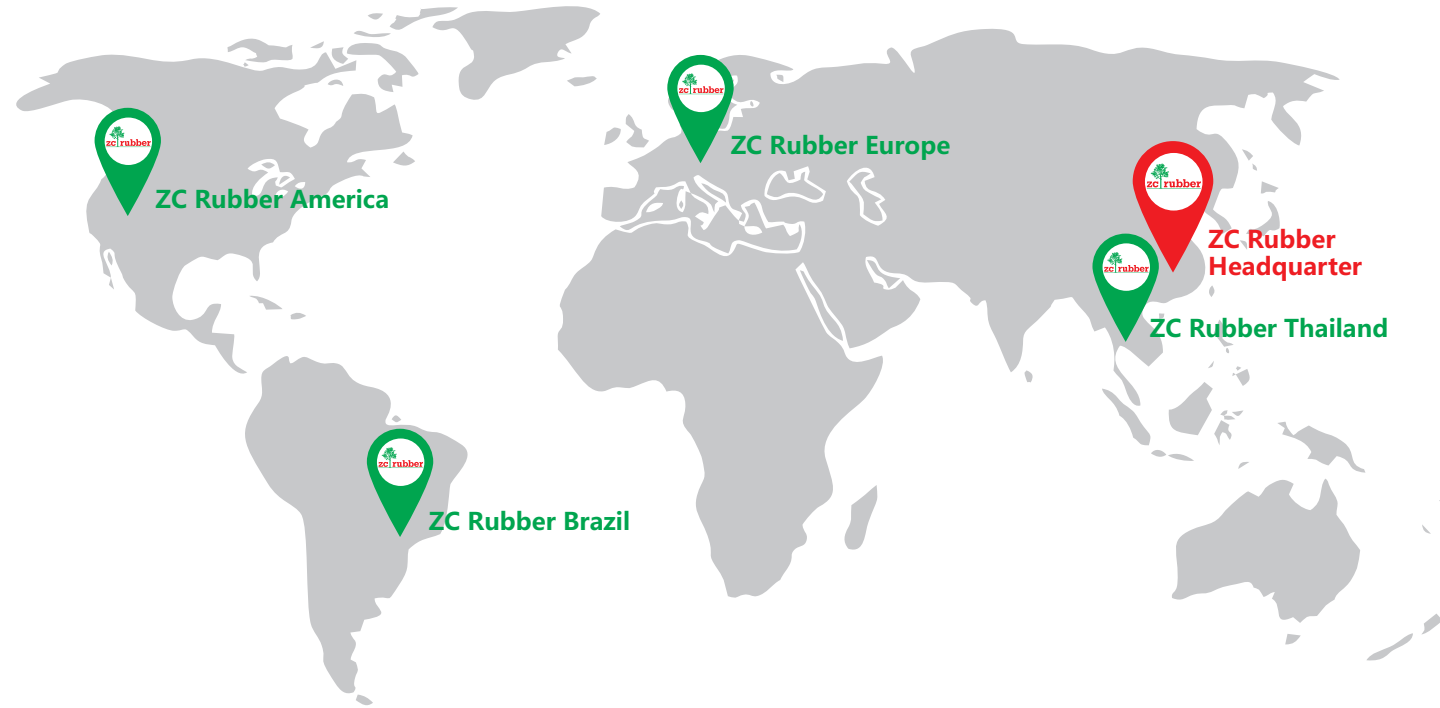


zc rubber



zc rubber



ZHONGCE RUBBER GROUP CO., LTD.



# 2019 TYRE CATALOGUE

Passenger Car, SUV and Light Truck






- A Company established in Year 1958
- No. 1 Tyre Manufacturer in Mainland China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2018
- Sale revenue reached USD3.62 billion in Year 2017

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities. Meanwhile the quality control system approved by global tyre manufacturers and

international vehicle manufacturers will guarantee the safety and quality of ZC-Rubber tyres.

Today ZC-Rubber is expanding from a Chinese oriented company to a global tyre manufacturer. The subsidiaries located in Southeast Asia, North America, South America and Europe (coming soon) are serving customers without any difference of time and language. The newly established Thailand plant will produce suitable products for local and nearby markets. Safe and value will be the key supplied by ZC-Rubber, who will craft a better future together with partners and friends all over the world.

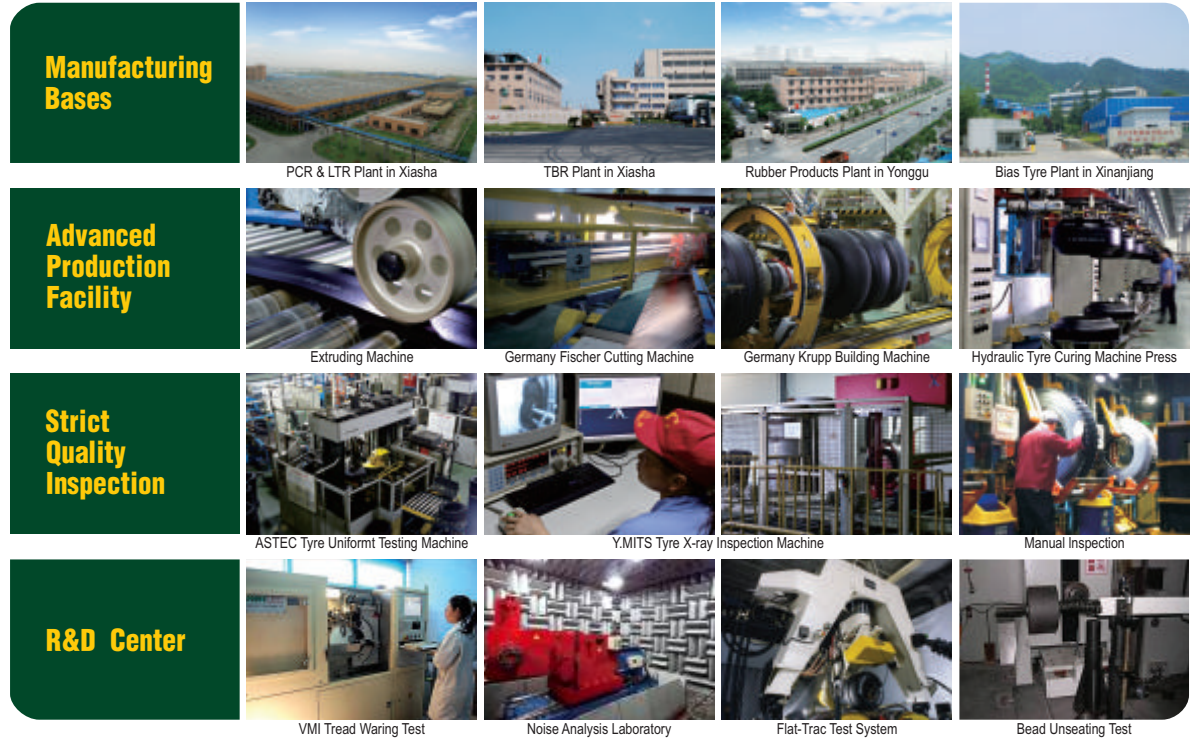



# Contents

**ULTRA HIGH PERFORMANCE** 05-09  
SA37 SPORT RS SA07 SA57

**PASSENGER** 10-13  
RP18 RP28 RP26 RP36

**SUV / LTR** 14-22  
SU318 SU317 SV308 SL369 SU327 SL366 SL386 SL309

**COMMERCIAL LTR** 23-28  
SC328 SL305 SC326 H188 ST303 ST313

**WINTER** 29-35  
CR857+ SW658 SW618 SW608 Z-507 SW612 SW606

**STR** 36  
STZC ST100 CR960A

**ATTACHMENT** 37-40





# SA37

| Size           | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG         |
|----------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------------|
| ● 195/45R15    | 78V           | 6.5J         | 195                | 557                   | 425            | 300                     | 280 AA A     |
| ● 195/50R15    | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 280 AA A     |
| ● 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 280 AA A     |
| ● 195/65R15    | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 280 AA A     |
| ● 195/45R16 XL | 84V           | 6.5J         | 195                | 582                   | 500            | 350                     | 280 AA A     |
| ● 205/45R16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 280 AA A     |
| ● 195/50R16    | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 280 AA A     |
| ● 205/50R16    | 87W           | 6.5J         | 214                | 612                   | 545            | 300                     | 280 AA A     |
| ● 225/50R16    | 92W           | 7.0J         | 233                | 632                   | 630            | 300                     | 280 AA A     |
| ● 205/55R16    | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 280 AA A     |
| ● 205/55R16    | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 280 AA A ZRT |
| ● 205/55R16 XL | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 280 AA A     |
| ● 215/55R16    | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 280 AA A     |
| ● 225/55R16 XL | 99W           | 7.0J         | 233                | 654                   | 775            | 350                     | 280 AA A     |
| ● 165/40R17    | 72V           | 6.0J         | 170                | 564                   | 355            | 300                     | 280 AA A     |
| ● 195/40Z17 XL | 81W           | 7.0J         | 200                | 588                   | 462            | 350                     | 280 AA A     |
| ● 205/40Z17 XL | 84W           | 7.5J         | 212                | 596                   | 500            | 350                     | 280 AA A     |
| ● 215/40Z17 XL | 87W           | 7.5J         | 218                | 604                   | 545            | 350                     | 280 AA A     |
| ● 245/40Z17 XL | 95Y           | 8.5J         | 248                | 628                   | 690            | 350                     | 280 AA A     |
| ● 205/45Z17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 280 AA A     |
| ● 215/45Z17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 280 AA A     |
| ● 225/45Z17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 280 AA A     |
| ● 225/45R17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 280 AA A ZRT |
| ● 235/45Z17 XL | 97W           | 8.0J         | 236                | 644                   | 730            | 350                     | 280 AA A     |
| ● 245/45Z17 XL | 99W           | 8.0J         | 243                | 652                   | 775            | 350                     | 280 AA A     |
| ● 255/45Z17 XL | 102W          | 8.5J         | 255                | 662                   | 850            | 350                     | 280 AA A     |
| ● 205/50R17 XL | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 280 AA A     |
| ● 215/50R17 XL | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 280 AA A     |
| ● 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 280 AA A     |
| ● 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 280 AA A ZRT |
| ● 235/50R17    | 96V           | 7.5J         | 245                | 668                   | 710            | 300                     | 280 AA A     |
| ● 205/55R17 XL | 95W           | 6.5J         | 214                | 658                   | 690            | 350                     | 280 AA A     |
| ● 215/55R17 XL | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 280 AA A     |
| ● 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 280 AA A     |
| ● 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 280 AA A ZRT |
| ● 235/55R17 XL | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 280 AA A     |
| ● 215/35Z18 XL | 84W           | 7.5J         | 218                | 607                   | 500            | 350                     | 280 AA A     |
| ● 225/35Z18 XL | 87Y           | 8.0J         | 230                | 615                   | 545            | 350                     | 280 AA A     |
| ● 245/35Z18 XL | 92W           | 8.5J         | 248                | 629                   | 630            | 350                     | 280 AA A     |
| ● 265/35Z18 XL | 97Y           | 9.5J         | 271                | 643                   | 730            | 350                     | 280 AA A     |
| ● 215/40Z18 XL | 89W           | 7.5J         | 218                | 629                   | 580            | 350                     | 280 AA A     |
| ● 225/40Z18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 280 AA A     |
| ● 235/40Z18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 280 AA A     |
| ● 245/40Z18 XL | 97Y           | 8.5J         | 248                | 653                   | 730            | 350                     | 280 AA A     |
| ● 255/40Z18 XL | 99Y           | 9.0J         | 260                | 661                   | 775            | 350                     | 280 AA A     |
| ● 215/45Z18 XL | 93W           | 7.0J         | 213                | 651                   | 650            | 350                     | 280 AA A     |
| ● 225/45Z18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 280 AA A     |
| ● 225/45R18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 280 AA A ZRT |
| ● 235/45Z18    | 94W           | 8.0J         | 236                | 669                   | 670            | 300                     | 280 AA A     |
| ● 245/45Z18 XL | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 280 AA A     |
| ● 245/45R18    | 96W           | 8.0J         | 243                | 677                   | 710            | 350                     | 280 AA A ZRT |

● Made in Thailand ● Made in China ZRT ZC Rubber RunFlat Tyres


# SA37

| Size           | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG         |
|----------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------------|
| ● 255/45Z18    | 99W           | 8.5J         | 255                | 687                   | 775            | 300                     | 280 AA A     |
| ● 225/50R18    | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 280 AA A     |
| ● 235/50R18 XL | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | 280 AA A     |
| ● 245/50R18    | 100W          | 7.5J         | 253                | 703                   | 800            | 300                     | 280 AA A     |
| ● 245/50R18    | 100W          | 7.5J         | 253                | 703                   | 800            | 300                     | 280 AA A ZRT |
| ● 215/55R18 XL | 99V           | 7.0J         | 226                | 693                   | 775            | 350                     | 280 AA A     |
| ● 255/55R18 XL | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 280 AA A     |
| ● 255/55R18 XL | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 280 AA A ZRT |
| ● 265/60R18    | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 280 AA A     |
| ● 265/30Z19 XL | 93Y           | 9.5J         | 271                | 643                   | 650            | 350                     | 280 AA A     |
| ● 275/30Z19 XL | 96W           | 9.5J         | 278                | 649                   | 710            | 250                     | 280 AA A     |
| ● 235/35Z19 XL | 91Y           | 8.5J         | 241                | 647                   | 615            | 350                     | 280 AA A     |
| ● 245/35Z19 XL | 93Y           | 8.5J         | 248                | 655                   | 650            | 350                     | 280 AA A     |
| ● 255/35Z19 XL | 96Y           | 9.0J         | 260                | 661                   | 710            | 350                     | 280 AA A     |
| ● 275/35Z19 XL | 100W          | 9.5J         | 278                | 675                   | 800            | 350                     | 280 AA A     |
| ● 225/40Z19 XL | 93Y           | 8.0J         | 230                | 663                   | 650            | 350                     | 280 AA A     |
| ● 245/40Z19 XL | 98Y           | 8.5J         | 248                | 679                   | 750            | 350                     | 280 AA A     |
| ● 245/40R19    | 94Y           | 8.5J         | 248                | 679                   | 670            | 300                     | 280 AA A ZRT |
| ● 255/40Z19 XL | 100Y          | 9.0J         | 260                | 687                   | 800            | 350                     | 280 AA A     |
| ● 275/40R19    | 101W          | 9.5J         | 278                | 703                   | 825            | 300                     | 280 AA A ZRT |
| ● 225/45Z19 XL | 96W           | 7.5J         | 225                | 685                   | 710            | 350                     | 280 AA A     |
| ● 245/45Z19    | 98Y           | 8.0J         | 243                | 703                   | 750            | 300                     | 280 AA A     |
| ● 245/45R19    | 98Y           | 8.0J         | 243                | 703                   | 750            | 300                     | 280 AA A ZRT |
| ● 255/45Z19 XL | 104Y          | 8.5J         | 255                | 713                   | 900            | 350                     | 280 AA A     |
| ● 235/50R19    | 99W           | 7.5J         | 245                | 719                   | 775            | 300                     | 280 AA A     |
| ● 255/50R19    | 107W          | 8.0J         | 265                | 739                   | 975            | 350                     | 280 AA A ZRT |
| ● 225/30Z20 XL | 85W           | 8.0J         | 230                | 644                   | 515            | 350                     | 280 AA A     |
| ● 275/30Z20 XL | 97Y           | 9.5J         | 278                | 674                   | 730            | 350                     | 280 AA A     |
| ● 225/35Z20 XL | 90W           | 8.0J         | 230                | 666                   | 600            | 350                     | 280 AA A     |
| ● 245/35Z20 XL | 95Y           | 8.5J         | 248                | 680                   | 690            | 350                     | 280 AA A     |
| ● 255/35Z20 XL | 97W           | 9.0J         | 260                | 686                   | 730            | 350                     | 280 AA A     |
| ● 275/35Z20 XL | 102W          | 9.5J         | 278                | 700                   | 850            | 350                     | 280 AA A     |
| ● 245/40Z20 XL | 99W           | 8.5J         | 248                | 704                   | 775            | 350                     | 280 AA A     |
| ● 245/45Z20    | 99W           | 8.0J         | 243                | 728                   | 775            | 300                     | 280 AA A     |
| ● 255/45Z20 XL | 105W          | 8.5J         | 255                | 748                   | 925            | 350                     | 280 AA A     |
| ● 265/45Z20 XL | 108W          | 9.0J         | 266                | 746                   | 1000           | 350                     | 280 AA A     |
| ● 245/50R20    | 102W          | 7.5J         | 253                | 754                   | 850            | 300                     | 280 AA A     |
| ● 265/50R20 XL | 111W          | 8.5J         | 277                | 774                   | 1090           | 350                     | 280 AA A     |
| ● 275/50R20 XL | 113W          | 8.5J         | 284                | 784                   | 1150           | 350                     | 280 AA A     |
| ● 235/55R20 XL | 105W          | 7.5J         | 245                | 766                   | 925            | 350                     | 280 AA A     |
| ● 255/55R20 XL | 110W          | 8.0J         | 265                | 788                   | 1060           | 350                     | 280 AA A     |
| ● 295/35Z21 XL | 107Y          | 10.5J        | 301                | 739                   | 975            | 350                     | 280 AA A     |
| ● 265/40Z21 XL | 105W          | 9.5J         | 271                | 745                   | 925            | 350                     | 280 AA A     |
| ● 315/40Z21    | 111Y          | 11.0J        | 320                | 785                   | 1090           | 300                     | 280 AA A     |
| ● 265/45Z21    | 104W          | 9.0J         | 266                | 771                   | 900            | 300                     | 280 AA A     |
| ● 275/45Z21 XL | 110Y          | 9.0J         | 273                | 781                   | 1060           | 350                     | 280 AA A     |
| ● 235/30Z22 XL | 90W           | 8.5J         | 241                | 701                   | 600            | 350                     | 280 AA A     |
| ● 245/30Z22 XL | 92W           | 8.5J         | 248                | 707                   | 630            | 350                     | 280 AA A     |
| ● 285/45R22 XL | 114V          | 9.5J         | 285                | 815                   | 1180           | 350                     | 280 AA A     |
| ● 255/30Z24 XL | 97W           | 9.0J         | 260                | 764                   | 730            | 350                     | 280 AA A     |

● Made in Thailand ● Made in China ZRT ZC Rubber RunFlat Tyres

## M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 24 |
| SERIES       | 30 - 65 |
| SPEED RATING | H - Y   |



## Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel

## ZC Rubber RunFlat Tyres ( ZRT )



### SPECIAL REINFORCED SIDEWALL CONSTRUCTION

Supporting the tyres even if the air pressure dropped to zero

### ADVANCED CARCASS STRUCTURE

Enhance the tyre body and avoid possible tyre failure during low pressure driving






## SPORT RS

| Size          | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG     |
|---------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|
| 195/50R15     | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 240 AA A |
| 205/50R15 XL  | 89V           | 6.5J         | 214                | 587                   | 580            | 350                     | 240 AA A |
| 205/45ZR16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 240 AA A |
| 225/50R16 XL  | 96W           | 7.0J         | 233                | 632                   | 710            | 350                     | 240 AA A |
| 235/40ZR17    | 90W           | 8.5J         | 241                | 620                   | 600            | 300                     | 240 AA A |
| 245/40ZR17 XL | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 240 AA A |
| 215/45ZR17    | 87W           | 7.0J         | 213                | 626                   | 545            | 300                     | 240 AA A |
| 225/45ZR17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 240 AA A |
| 235/45ZR17    | 94W           | 8.0J         | 236                | 644                   | 670            | 300                     | 240 AA A |
| 265/35ZR18 XL | 97W           | 9.5J         | 271                | 643                   | 730            | 350                     | 240 AA A |
| 285/35ZR18 XL | 101W          | 10.0J        | 290                | 657                   | 825            | 350                     | 240 AA A |
| 225/40ZR18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 240 AA A |
| 235/40ZR18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 240 AA A |
| 275/30ZR19 XL | 96W           | 9.5J         | 278                | 649                   | 710            | 350                     | 240 AA A |
| 235/35ZR19 XL | 91W           | 8.5J         | 241                | 647                   | 615            | 350                     | 240 AA A |
| 285/35ZR19 XL | 103W          | 10.0J        | 290                | 683                   | 875            | 350                     | 240 AA A |
| 285/35ZR20 XL | 104W          | 10.0J        | 290                | 708                   | 900            | 350                     | 240 AA A |
| 255/40ZR20 XL | 101W          | 9.0J         | 260                | 712                   | 825            | 350                     | 240 AA A |

● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 20 |
| SERIES       | 30 - 50 |
| SPEED RATING | V - W   |



### Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Asymmetric tread design with big pattern blocks and special compound provides superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability


## SA07

| Size          | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|---------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 195/45R16 XL  | 84V           | 6.5J         | 195                | 582                   | 500            | 350                     | 460 A A |
| 205/55R16     | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 460 A A |
| 215/55R16     | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 460 A A |
| 225/55R16     | 95W           | 7.0J         | 233                | 654                   | 690            | 300                     | 460 A A |
| 205/40ZR17 XL | 84W           | 7.5J         | 212                | 596                   | 500            | 350                     | 460 A A |
| 215/40ZR17 XL | 87W           | 7.5J         | 218                | 604                   | 545            | 350                     | 460 A A |
| 245/40ZR17 XL | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 460 A A |
| 205/45ZR17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 460 A A |
| 215/45ZR17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 460 A A |
| 225/45ZR17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 460 A A |
| 235/45ZR17 XL | 97W           | 8.0J         | 236                | 644                   | 730            | 350                     | 460 A A |
| 245/45ZR17    | 95Y           | 8.0J         | 243                | 652                   | 690            | 300                     | 460 A A |
| 255/45ZR17    | 98W           | 8.5J         | 255                | 662                   | 750            | 300                     | 460 A A |
| 205/50R17     | 89W           | 6.5J         | 214                | 638                   | 580            | 300                     | 460 A A |
| 215/50R17     | 91W           | 7.0J         | 226                | 648                   | 615            | 300                     | 460 A A |
| 225/50R17     | 94W           | 7.0J         | 233                | 658                   | 670            | 300                     | 460 A A |
| 235/50R17 XL  | 100W          | 7.5J         | 245                | 668                   | 800            | 350                     | 460 A A |
| 215/55R17     | 94V           | 7.0J         | 226                | 668                   | 670            | 300                     | 460 A A |
| 225/55R17     | 97W           | 7.0J         | 233                | 680                   | 730            | 300                     | 460 A A |
| 235/55R17     | 99W           | 7.5J         | 245                | 690                   | 775            | 300                     | 460 A A |
| 215/35ZR18 XL | 84W           | 7.5J         | 218                | 607                   | 500            | 350                     | 460 A A |
| 215/40ZR18 XL | 89W           | 7.5J         | 218                | 629                   | 580            | 350                     | 460 A A |
| 225/40ZR18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 460 A A |
| 235/40ZR18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 460 A A |
| 245/40ZR18 XL | 97Y           | 8.5J         | 248                | 653                   | 730            | 350                     | 460 A A |
| 215/45ZR18    | 89W           | 7.0J         | 213                | 651                   | 580            | 300                     | 460 A A |
| 225/45ZR18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 460 A A |
| 235/45ZR18    | 94Y           | 8.0J         | 236                | 669                   | 670            | 300                     | 460 A A |
| 245/45ZR18    | 96Y           | 8.0J         | 243                | 677                   | 710            | 300                     | 460 A A |
| 225/50R18     | 95V           | 7.0J         | 233                | 683                   | 690            | 300                     | 460 A A |
| 235/50R18 XL  | 101W          | 7.5J         | 245                | 693                   | 825            | 350                     | 460 A A |
| 245/50R18     | 100Y          | 7.5J         | 253                | 703                   | 800            | 300                     | 460 A A |
| 235/35ZR19 XL | 91W           | 8.5J         | 241                | 647                   | 615            | 350                     | 460 A A |
| 245/35ZR19 XL | 93W           | 8.5J         | 248                | 655                   | 650            | 350                     | 460 A A |
| 255/35ZR19 XL | 96W           | 9.0J         | 260                | 661                   | 710            | 350                     | 460 A A |
| 225/40ZR19 XL | 93W           | 8.0J         | 230                | 663                   | 650            | 350                     | 460 A A |
| 245/40ZR19    | 94Y           | 8.5J         | 248                | 679                   | 670            | 300                     | 460 A A |
| 255/40ZR19 XL | 100W          | 9.0J         | 260                | 687                   | 800            | 350                     | 460 A A |
| 275/40R19     | 101V          | 9.5J         | 278                | 703                   | 825            | 300                     | 460 A A |
| 245/45R19     | 98V           | 8.0J         | 243                | 703                   | 750            | 300                     | 460 A A |
| 255/45R19     | 100V          | 8.5J         | 255                | 713                   | 800            | 300                     | 460 A A |
| 245/35ZR20 XL | 95W           | 8.5J         | 248                | 680                   | 690            | 350                     | 460 A A |
| 265/50R20 XL  | 111V          | 8.5J         | 277                | 774                   | 1090           | 350                     | 460 A A |

● Made in Thailand ● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 16 - 20 |
| SERIES       | 35 - 55 |
| SPEED RATING | V - Y   |



### Benefits and Features

- Premium performance tyres for sedans and race cars
- SILICA TECH was adopted for low rolling resistance and precise control
- RIM PROTECTOR protects the wheel rim and provides superior handling control and enhanced cornering





# SA57

| Size          | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|---------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 185/60R14     | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 460 A A |
| 175/65R14     | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 460 A A |
| 185/65R14     | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 460 A A |
| 195/50R15     | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 460 A A |
| 185/55R15     | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 460 A A |
| 195/55R15     | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 460 A A |
| 185/60R15     | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 460 A A |
| 195/60R15     | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 460 A A |
| 195/65R15     | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 460 A A |
| 205/45ZR16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 460 A A |
| 195/50R16     | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 460 A A |
| 205/50R16     | 87W           | 6.5J         | 214                | 612                   | 545            | 300                     | 460 A A |
| 225/50R16     | 92W           | 7.0J         | 233                | 632                   | 630            | 300                     | 460 A A |
| 205/55R16 XL  | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 460 A A |
| 215/55R16 XL  | 97W           | 7.0J         | 226                | 642                   | 730            | 350                     | 460 A A |
| 225/55R16 XL  | 99W           | 7.0J         | 233                | 654                   | 775            | 350                     | 460 A A |
| 235/60R16     | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 460 A A |
| 205/40ZR17 XL | 84W           | 7.5J         | 212                | 596                   | 500            | 350                     | 460 A A |
| 215/40ZR17 XL | 87W           | 7.5J         | 218                | 604                   | 545            | 350                     | 460 A A |
| 245/40ZR17 XL | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 460 A A |
| 205/45ZR17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 460 A A |
| 215/45ZR17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 460 A A |
| 225/45ZR17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 460 A A |
| 235/45ZR17 XL | 97W           | 8.0J         | 236                | 644                   | 730            | 350                     | 460 A A |
| 205/50R17 XL  | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 460 A A |
| 215/50R17 XL  | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 460 A A |
| 225/50R17 XL  | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 460 A A |
| 215/55R17 XL  | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 460 A A |
| 225/55R17 XL  | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 460 A A |
| 235/55R17 XL  | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 460 A A |
| 265/35ZR18 XL | 97W           | 9.5J         | 271                | 643                   | 730            | 350                     | 460 A A |
| 225/40ZR18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 460 A A |
| 235/40ZR18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 460 A A |
| 245/40ZR18 XL | 97W           | 8.5J         | 248                | 653                   | 730            | 350                     | 460 A A |
| 225/45ZR18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 460 A A |
| 235/45ZR18 XL | 98W           | 8.0J         | 236                | 669                   | 750            | 350                     | 460 A A |
| 245/45ZR18 XL | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 460 A A |
| 225/50R18     | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 460 A A |
| 235/50R18 XL  | 101W          | 7.5J         | 245                | 693                   | 825            | 350                     | 460 A A |
| 255/55R18 XL  | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 460 A A |
| 265/60R18     | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 460 A A |
| 215/35ZR19 XL | 85W           | 7.5J         | 218                | 633                   | 515            | 350                     | 460 A A |
| 225/35ZR19 XL | 88W           | 8.0J         | 230                | 641                   | 560            | 350                     | 460 A A |
| 245/45ZR19 XL | 102W          | 8.0J         | 243                | 703                   | 850            | 350                     | 460 A A |
| 255/45ZR19 XL | 104W          | 8.5J         | 255                | 713                   | 900            | 350                     | 460 A A |
| 245/30ZR20 XL | 90W           | 8.5J         | 248                | 656                   | 600            | 350                     | 460 A A |
| 275/40ZR20 XL | 106W          | 9.5J         | 278                | 728                   | 950            | 350                     | 460 A A |
| 255/45R20 XL  | 105V          | 8.5J         | 255                | 738                   | 925            | 350                     | 460 A A |
| 275/45R20 XL  | 110V          | 9.0J         | 273                | 756                   | 1060           | 350                     | 460 A A |
| 265/50R20 XL  | 111V          | 8.5J         | 277                | 774                   | 1090           | 350                     | 460 A A |
| 285/50R20     | 112V          | 9.0J         | 297                | 794                   | 1120           | 300                     | 460 A A |
| 275/55R20 XL  | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 460 A A |
| 275/60R20 XL  | 119V          | 8.0J         | 279                | 838                   | 1360           | 350                     | 460 A A |
| 265/35R22 XL  | 102V          | 9.5J         | 271                | 745                   | 850            | 350                     | 460 A A |
| 285/35R22 XL  | 106V          | 10.0J        | 290                | 759                   | 950            | 350                     | 460 A A |
| 265/40R22 XL  | 106V          | 9.5J         | 271                | 771                   | 950            | 350                     | 460 A A |
| 305/40R22 XL  | 114V          | 11.0J        | 313                | 803                   | 1180           | 350                     | 460 A A |
| 305/45R22 XL  | 118V          | 10.0J        | 303                | 833                   | 1320           | 350                     | 460 A A |
| 295/35R24 XL  | 110V          | 10.5J        | 301                | 816                   | 1060           | 350                     | 460 A A |

M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 24 |
| SERIES       | 30 - 65 |
| SPEED RATING | H - W   |



### Benefits and Features

- New generation of directional Ultra High Performance tyre
- Circumferential V-grooves ensure outstanding water drainage
- Strong center ribs provides remarkable handling while steering
- Improved SILICA compounding enhance the wet and dry grip


# RP18

| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 155/65R13    | 73T           | 4.5B         | 157                | 532                   | 365            | 300                     | 500 A A |
| 165/65R13    | 77T           | 5.0B         | 170                | 544                   | 412            | 300                     | 500 A A |
| 165/70R13    | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | 500 A A |
| 175/70R13    | 82T           | 5.0B         | 177                | 576                   | 475            | 300                     | 500 A A |
| 185/70R13    | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 500 A A |
| 155/80R13    | 79T           | 4.5B         | 157                | 578                   | 437            | 300                     | 500 A A |
| 165/80R13    | 83T           | 4.5B         | 165                | 594                   | 487            | 300                     | 500 A A |
| 165/55R14    | 72V           | 5.0J         | 170                | 538                   | 355            | 300                     | 500 A A |
| 185/60R14    | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 500 A A |
| 195/60R14    | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 500 A A |
| 155/65R14    | 75H           | 4.5B         | 157                | 558                   | 387            | 300                     | 500 A A |
| 165/65R14    | 79H           | 5.0J         | 170                | 570                   | 437            | 300                     | 500 A A |
| 175/65R14    | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 500 A A |
| 185/65R14    | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 500 A A |
| 165/70R14    | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 500 A A |
| 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 500 A A |
| 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 500 A A |
| 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 500 A A |
| 205/70R14    | 95T           | 6.0J         | 209                | 644                   | 690            | 300                     | 500 A A |
| 175/80R14    | 88T           | 5.0J         | 177                | 636                   | 560            | 300                     | 500 A A |
| 185/80R14    | 91T           | 5.0J         | 184                | 652                   | 615            | 300                     | 500 A A |
| 165/50R15    | 72V           | 5.0J         | 170                | 547                   | 355            | 300                     | 500 A A |
| 195/50R15    | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 500 A A |
| 185/55R15    | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 500 A A |
| 195/55R15    | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 500 A A |
| 205/55R15    | 88V           | 6.5J         | 214                | 607                   | 560            | 300                     | 500 A A |
| 185/60R15    | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 500 A A |
| 195/60R15    | 88H           | 6.0J         | 201                | 615                   | 560            | 300                     | 500 A A |
| 205/60R15    | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 500 A A |
| 215/60R15    | 94H           | 6.5J         | 221                | 639                   | 670            | 300                     | 500 A A |
| 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 500 A A |
| 195/65R15    | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | 500 A A |
| 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 500 A A |
| 215/65R15    | 96H           | 6.5J         | 221                | 661                   | 710            | 300                     | 500 A A |
| 205/70R15    | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 500 A A |
| 215/70R15    | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 500 A A |
| 205/50R16    | 87V           | 6.5J         | 214                | 612                   | 545            | 300                     | 500 A A |
| 195/55R16 XL | 91H           | 6.0J         | 201                | 620                   | 545            | 350                     | 500 A A |
| 205/55R16    | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 500 A A |
| 225/55R16    | 95V           | 7.0J         | 233                | 654                   | 690            | 300                     | 500 A A |
| 195/60R16    | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 500 A A |
| 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 500 A A |
| 215/60R16    | 95H           | 6.5J         | 221                | 664                   | 690            | 300                     | 500 A A |
| 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 500 A A |
| 235/60R16    | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 500 A A |
| 205/65R16    | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 500 A A |
| 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 500 A A |
| 225/65R16    | 100H          | 6.5J         | 228                | 698                   | 800            | 300                     | 500 A A |
| 235/65R16    | 103H          | 7.0J         | 240                | 712                   | 875            | 300                     | 500 A A |

🇹🇭 Made in Thailand 🇨🇳 Made in China

M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 16 |
| SERIES       | 50 - 80 |
| SPEED RATING | T - V   |



### Benefits and Features

- Premium all-season touring tyres with M+S rated offering consistent highway performance
- Improved tyre structure guarantees a comfort and smooth ride
- CAD designed tyre tread helps to reduce road noise significantly
- Remarkable handling on dry and wet road surface





# RP28

| Size      | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|-----------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 155/65R13 | 73T           | 4.5J         | 157                | 532                   | 365            | 300                     | 400 A A |
| 165/65R13 | 77T           | 5.0J         | 170                | 544                   | 412            | 300                     | 400 A A |
| 155/70R13 | 75T           | 4.5B         | 157                | 548                   | 387            | 300                     | 400 A A |
| 165/70R13 | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | 400 A A |
| 175/70R13 | 82T           | 5.0B         | 177                | 576                   | 475            | 300                     | 400 A A |
| 185/70R13 | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 400 A A |
| 155/80R13 | 79T           | 4.5B         | 157                | 578                   | 437            | 300                     | 400 A A |
| 165/80R13 | 83T           | 4.5B         | 165                | 594                   | 487            | 300                     | 400 A A |
| 185/55R14 | 80V           | 6.0J         | 194                | 560                   | 450            | 300                     | 360 A A |
| 165/60R14 | 75H           | 5.0J         | 170                | 554                   | 387            | 300                     | 400 A A |
| 175/60R14 | 79H           | 5.0J         | 177                | 566                   | 437            | 300                     | 400 A A |
| 185/60R14 | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 400 A A |
| 195/60R14 | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 440 A A |
| 205/60R14 | 88H           | 6.0J         | 209                | 602                   | 560            | 300                     | 440 A A |
| 155/65R14 | 75T           | 4.5J         | 157                | 558                   | 387            | 300                     | 400 A A |
| 165/65R14 | 79T           | 5.0J         | 170                | 570                   | 437            | 300                     | 400 A A |
| 175/65R14 | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 400 A A |
| 185/65R14 | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 400 A A |
| 195/65R14 | 89H           | 6.0J         | 201                | 610                   | 580            | 300                     | 440 A A |
| 165/70R14 | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 400 A A |
| 175/70R14 | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 400 A A |
| 185/70R14 | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 400 A A |
| 195/70R14 | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 440 A A |
| 205/70R14 | 95T           | 6.0J         | 209                | 644                   | 690            | 300                     | 440 A A |
| 195/50R15 | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 360 A A |
| 185/55R15 | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 360 A A |
| 195/55R15 | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 360 A A |
| 175/60R15 | 81H           | 5.0J         | 177                | 591                   | 462            | 300                     | 400 A A |
| 185/60R15 | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 400 A A |
| 195/60R15 | 88H           | 6.0J         | 201                | 615                   | 560            | 300                     | 440 A A |
| 205/60R15 | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 440 A A |
| 215/60R15 | 94H           | 6.5J         | 221                | 639                   | 670            | 300                     | 440 A A |
| 165/65R15 | 81H           | 5.0J         | 170                | 595                   | 462            | 300                     | 400 A A |
| 175/65R15 | 84H           | 5.0J         | 177                | 609                   | 500            | 300                     | 400 A A |
| 185/65R15 | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 400 A A |
| 195/65R15 | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | 440 A A |
| 205/65R15 | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 440 A A |
| 215/65R15 | 96H           | 6.5J         | 221                | 661                   | 710            | 300                     | 440 A A |
| 205/70R15 | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 440 A A |
| 215/70R15 | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 440 A A |
| 195/50R16 | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 360 A A |
| 205/50R16 | 87V           | 6.5J         | 214                | 612                   | 545            | 300                     | 360 A A |
| 185/55R16 | 83V           | 6.0J         | 194                | 610                   | 487            | 300                     | 360 A A |
| 195/55R16 | 87V           | 6.0J         | 201                | 620                   | 545            | 300                     | 360 A A |
| 205/55R16 | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 360 A A |
| 215/55R16 | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 360 A A |
| 225/55R16 | 95V           | 7.0J         | 233                | 654                   | 690            | 300                     | 360 A A |
| 195/60R16 | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 440 A A |
| 205/60R16 | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 440 A A |
| 215/60R16 | 95H           | 6.5J         | 221                | 664                   | 690            | 300                     | 440 A A |
| 225/60R16 | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 440 A A |
| 235/60R16 | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 440 A A |
| 205/65R16 | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 440 A A |
| 215/65R16 | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 440 A A |
| 225/65R16 | 100H          | 6.5J         | 228                | 698                   | 800            | 300                     | 440 A A |
| 235/65R16 | 103H          | 7.0J         | 240                | 712                   | 875            | 300                     | 440 A A |

● Made in China


# RP26

| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 175/60R13    | 77H           | 5.0J         | 177                | 540                   | 412            | 300                     | 440 A A |
| 205/60R13    | 86T           | 6.0J         | 209                | 576                   | 530            | 300                     | 480 A A |
| 155/65R13    | 73T           | 4.5B         | 157                | 532                   | 365            | 300                     | 440 A A |
| 165/65R13    | 77T           | 5.0B         | 170                | 544                   | 412            | 300                     | 440 A A |
| 165/70R13    | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | 440 A A |
| 175/70R13    | 82T           | 5.0B         | 177                | 576                   | 475            | 300                     | 440 A A |
| 185/70R13    | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 480 A A |
| 155/80R13    | 79T           | 4.5B         | 157                | 578                   | 437            | 300                     | 440 A A |
| 165/80R13    | 83T           | 4.5B         | 165                | 594                   | 487            | 300                     | 440 A A |
| 175/60R14    | 79H           | 5.0J         | 177                | 566                   | 437            | 300                     | 440 A A |
| 185/60R14    | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 480 A A |
| 195/60R14    | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 480 A A |
| 155/65R14    | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | 440 A A |
| 175/65R14    | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 440 A A |
| 185/65R14    | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 480 A A |
| 165/70R14    | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 440 A A |
| 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 440 A A |
| 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 480 A B |
| 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 480 A A |
| 205/70R14    | 95T           | 6.0J         | 209                | 644                   | 690            | 300                     | 480 A A |
| 175/80R14    | 88T           | 5.0J         | 177                | 636                   | 560            | 300                     | 440 A A |
| 185/80R14    | 91T           | 5.0J         | 184                | 652                   | 615            | 300                     | 480 A A |
| 175/50R15    | 75V           | 5.5J         | 182                | 557                   | 387            | 300                     | 440 A A |
| 195/50R15    | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 360 A A |
| 175/55R15    | 77T           | 5.5J         | 182                | 573                   | 412            | 300                     | 440 A A |
| 185/55R15    | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 360 A A |
| 195/55R15    | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 360 A A |
| 205/55R15    | 88V           | 6.5J         | 214                | 607                   | 560            | 300                     | 360 A A |
| 175/60R15    | 81H           | 5.0J         | 177                | 591                   | 462            | 300                     | 440 A A |
| 185/60R15    | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 480 A A |
| 195/60R15    | 88H           | 6.0J         | 201                | 615                   | 560            | 300                     | 480 A A |
| 205/60R15    | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 480 A A |
| 215/60R15    | 94H           | 6.5J         | 221                | 639                   | 670            | 300                     | 480 A A |
| 175/65R15    | 84H           | 5.0J         | 177                | 609                   | 500            | 300                     | 440 A A |
| 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 480 A A |
| 195/65R15    | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | 480 A A |
| 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 480 A A |
| 215/65R15    | 96H           | 6.5J         | 221                | 661                   | 710            | 300                     | 480 A A |
| 205/70R15    | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 480 A A |
| 215/70R15    | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 480 A A |
| 195/50R16    | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 360 A A |
| 185/55R16    | 83V           | 6.0J         | 194                | 610                   | 487            | 300                     | 360 A A |
| 195/55R16 XL | 91V           | 6.0J         | 201                | 620                   | 615            | 350                     | 360 A A |
| 205/55R16    | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 360 A A |
| 195/60R16    | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 480 A A |
| 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 480 A A |
| 215/60R16    | 95H           | 6.5J         | 221                | 664                   | 690            | 300                     | 480 A A |
| 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 480 A A |
| 235/60R16    | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 480 A A |
| 205/65R16    | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 480 A A |
| 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 480 A A |
| 225/65R16    | 100H          | 6.5J         | 228                | 698                   | 800            | 300                     | 480 A A |

● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 16 |
| SERIES       | 50 - 80 |
| SPEED RATING | T - V   |




### Benefits and Features

- A comfortable ride premium touring tyre
- Computer aided designed tread offering low noise and excellent water drainage
- SILICA TECH compounding technology ensuring low rolling resistance and saving fuel expenditure
- Improved shoulder sipes providing better handling during cornering

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 16 |
| SERIES       | 50 - 80 |
| SPEED RATING | T - V   |



### Benefits and Features

- Improved tyre structure compared to competitor for longer tyre life and more comfort ride
- Special compound offers remarkable tyre traction






## RP36

| Size      | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|-----------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| 155/65R13 | 73T           | 4.5B         | 157                | 532                   | 365            | 300                     | 440 A A |
| 165/65R13 | 77T           | 5.0B         | 170                | 544                   | 412            | 300                     | 440 A A |
| 155/70R13 | 75T           | 4.5B         | 157                | 548                   | 387            | 300                     | 440 A A |
| 165/70R13 | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | 440 A A |
| 175/70R13 | 82T           | 5.0B         | 177                | 576                   | 475            | 300                     | 440 A A |
| 185/70R13 | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 480 A A |
| 165/60R14 | 75H           | 5.0J         | 170                | 554                   | 387            | 300                     | 440 A A |
| 185/60R14 | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 480 A A |
| 195/60R14 | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 480 A A |
| 155/65R14 | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | 440 A A |
| 175/65R14 | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 440 A A |
| 185/65R14 | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 480 A A |
| 165/70R14 | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 440 A A |
| 175/70R14 | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 440 A A |
| 185/70R14 | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 480 A A |
| 195/70R14 | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 480 A A |
| 195/50R15 | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 360 A A |
| 195/55R15 | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 360 A A |
| 185/60R15 | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 480 A A |
| 195/60R15 | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 360 A A |
| 205/60R15 | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 480 A A |
| 185/65R15 | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 480 A A |
| 195/65R15 | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 360 A A |
| 205/65R15 | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 480 A A |
| 205/70R15 | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 480 A A |
| 215/70R15 | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 480 A A |
| 195/55R16 | 87V           | 6.0J         | 201                | 620                   | 545            | 300                     | 360 A A |
| 205/55R16 | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 360 A A |
| 215/55R16 | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 360 A A |
| 195/60R16 | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 480 A A |
| 205/60R16 | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 480 A A |
| 215/60R16 | 95H           | 6.5J         | 221                | 664                   | 690            | 300                     | 480 A A |
| 225/60R16 | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 480 A A |
| 235/60R16 | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 480 A A |
| 205/65R16 | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 480 A A |

● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 16 |
| SERIES       | 50 - 70 |
| SPEED RATING | T - V   |



### Benefits and Features

- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

## SU318


| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG        |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------------|
| 225/70R15    | 100T          | 6.5J         | 228                | 697                   | 800            | 300                     | 500 A A     |
| 235/70R15    | 103T          | 7.0J         | 240                | 711                   | 875            | 300                     | 500 A A     |
| 265/70R15    | 112T          | 8.0J         | 272                | 753                   | 1120           | 300                     | 500 A A     |
| 215/75R15    | 100T          | 6.0J         | 216                | 703                   | 800            | 300                     | 500 A A     |
| 225/75R15    | 102T          | 6.0J         | 223                | 719                   | 850            | 300                     | 500 A A     |
| 235/75R15    | 105T          | 6.5J         | 235                | 733                   | 925            | 300                     | 500 A A     |
| 265/75R15    | 112T          | 7.5J         | 267                | 779                   | 1120           | 300                     | 500 A A     |
| 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 450 A A     |
| 255/65R16    | 109T          | 7.5J         | 260                | 738                   | 1030           | 300                     | 500 A A     |
| 215/70R16    | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | 500 A A     |
| 225/70R16    | 103T          | 6.5J         | 228                | 722                   | 875            | 300                     | 500 A A     |
| 235/70R16    | 106T          | 7.0J         | 240                | 736                   | 950            | 300                     | 500 A A     |
| 245/70R16 XL | 111T          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A OWL |
| 255/70R16    | 111T          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A     |
| 265/70R16    | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A OWL |
| 275/70R16    | 114T          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A     |
| 225/75R16    | 104T          | 6.0J         | 223                | 744                   | 900            | 300                     | 500 A A     |
| 235/75R16    | 108T          | 6.5J         | 235                | 758                   | 1000           | 300                     | 500 A A     |
| 245/75R16    | 111T          | 7.0J         | 248                | 774                   | 1090           | 300                     | 500 A A     |
| 265/75R16    | 116T          | 7.5J         | 267                | 804                   | 1250           | 300                     | 500 A A     |
| 215/60R17    | 96H           | 6.5J         | 221                | 690                   | 710            | 300                     | 500 A A     |
| 225/60R17    | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | 500 A A     |
| 235/60R17    | 102T          | 7.0J         | 240                | 714                   | 850            | 300                     | 500 A A     |
| 255/60R17 XL | 110V          | 7.5J         | 260                | 738                   | 1060           | 350                     | 500 A A     |
| 265/60R17    | 108T          | 8.0J         | 272                | 750                   | 1000           | 300                     | 500 A A     |
| 275/60R17    | 110T          | 8.0J         | 279                | 762                   | 1060           | 300                     | 500 A A     |
| 215/65R17    | 99T           | 6.5J         | 221                | 712                   | 775            | 300                     | 500 A A     |
| 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | 500 A A     |
| 235/65R17    | 104T          | 7.0J         | 240                | 738                   | 900            | 300                     | 500 A A     |
| 245/65R17    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A     |
| 255/65R17    | 110H          | 7.5J         | 260                | 764                   | 1060           | 300                     | 500 A A     |
| 265/65R17    | 112T          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A OWL |
| 275/65R17    | 115T          | 8.0J         | 279                | 790                   | 1215           | 300                     | 500 A A     |
| 285/65R17    | 116H          | 8.5J         | 292                | 802                   | 1250           | 300                     | 500 A A     |
| 245/70R17    | 110T          | 7.0J         | 248                | 776                   | 1060           | 300                     | 500 A A     |
| 255/70R17    | 112T          | 7.5J         | 260                | 790                   | 1120           | 300                     | 500 A A     |
| 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | 500 A A     |
| 235/50R18    | 97V           | 7.5J         | 245                | 693                   | 730            | 300                     | 500 A A     |
| 225/55R18    | 98V           | 7.0J         | 233                | 705                   | 750            | 300                     | 500 A A     |
| 235/55R18    | 100V          | 7.5J         | 245                | 715                   | 800            | 300                     | 500 A A     |
| 255/55R18 XL | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 500 A A     |
| 225/60R18    | 100H          | 6.5J         | 228                | 727                   | 800            | 300                     | 500 A A     |
| 235/60R18    | 103V          | 7.0J         | 240                | 739                   | 875            | 300                     | 500 A A     |
| 245/60R18    | 105T          | 7.0J         | 248                | 751                   | 925            | 300                     | 500 A A     |
| 255/60R18 XL | 112V          | 7.5J         | 260                | 763                   | 1120           | 350                     | 500 A A     |
| 265/60R18 XL | 114V          | 8.0J         | 272                | 775                   | 1180           | 350                     | 500 A A OWL |
| 285/60R18    | 116H          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A     |
| 235/65R18    | 106H          | 7.0J         | 240                | 763                   | 950            | 300                     | 500 A A     |
| 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A     |
| 275/65R18    | 116T          | 8.0J         | 279                | 815                   | 1250           | 300                     | 500 A A     |
| 255/70R18    | 113T          | 7.5J         | 260                | 815                   | 1150           | 300                     | 500 A A     |
| 275/45R19 XL | 108V          | 9.0J         | 273                | 731                   | 1000           | 350                     | 500 A A     |
| 235/50R19    | 99V           | 7.5J         | 245                | 719                   | 775            | 300                     | 500 A A     |
| 255/50R19 XL | 107V          | 8.0J         | 265                | 739                   | 975            | 350                     | 500 A A     |
| 265/50R19 XL | 110V          | 8.5J         | 277                | 749                   | 1060           | 350                     | 500 A A     |
| 225/55R19    | 99V           | 7.0J         | 233                | 731                   | 772            | 300                     | 500 A A     |
| 235/55R19 XL | 105V          | 7.5J         | 245                | 741                   | 925            | 350                     | 500 A A     |
| 245/55R19    | 103V          | 7.5J         | 253                | 753                   | 875            | 300                     | 500 A A     |
| 255/55R19 XL | 111V          | 8.0J         | 265                | 763                   | 1090           | 350                     | 500 A A     |
| 255/60R19    | 109H          | 7.5J         | 260                | 789                   | 1030           | 300                     | 500 A A     |
| 275/40R20 XL | 106V          | 9.5J         | 278                | 728                   | 950            | 350                     | 500 A A     |
| 275/45R20 XL | 110V          | 9.0J         | 273                | 756                   | 1060           | 350                     | 500 A A     |
| 245/50R20    | 102V          | 7.5J         | 253                | 754                   | 850            | 300                     | 500 A A     |
| 255/50R20 XL | 109V          | 8.0J         | 265                | 764                   | 1030           | 350                     | 500 A A     |
| 235/55R20    | 102H          | 7.5J         | 245                | 766                   | 850            | 300                     | 500 A A     |
| 255/55R20    | 107H          | 8.0J         | 265                | 764                   | 1030           | 350                     | 500 A A     |
| 275/55R20 XL | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 500 A A     |

● Made in Thailand ● Made in China



### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 20 |
| SERIES       | 40 - 75 |
| SPEED RATING | T - V   |



### Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively





## SU317

| Size            | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG     |
|-----------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|
| ● P225/70R15    | 100H          | 6.5J         | 228                | 697                   | 800            | 300                     | 600 A A  |
| ● P235/70R15    | 103H          | 7.0J         | 240                | 711                   | 875            | 300                     | 600 A A  |
| ● P265/70R15    | 112H          | 8.0J         | 272                | 753                   | 1120           | 300                     | 600 A A  |
| ● P215/75R15    | 100H          | 6.0J         | 216                | 703                   | 800            | 300                     | 450 A A  |
| ● P225/75R15    | 102H          | 6.0J         | 223                | 719                   | 850            | 300                     | 600 A A  |
| ● P235/75R15    | 105H          | 6.5J         | 235                | 733                   | 925            | 300                     | 600 A A  |
| ● P215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 450 A A  |
| ● P255/65R16    | 109H          | 7.5J         | 260                | 738                   | 1030           | 300                     | 600 A A  |
| ● P215/70R16    | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | 600 A A  |
| ● P225/70R16    | 103H          | 6.5J         | 228                | 722                   | 875            | 300                     | 600 A A  |
| ● P235/70R16    | 106H          | 7.0J         | 240                | 736                   | 950            | 300                     | 450 A A  |
| ● P245/70R16    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | 600 A A  |
| ● P255/70R16    | 111H          | 7.5J         | 260                | 764                   | 1090           | 300                     | 600 A A  |
| ● P265/70R16    | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | 600 A A  |
| ● P275/70R16    | 114H          | 8.0J         | 279                | 792                   | 1180           | 300                     | 600 A A  |
| ● P225/75R16    | 104H          | 6.0J         | 223                | 744                   | 900            | 300                     | 600 A A  |
| ● P235/75R16    | 108H          | 6.5J         | 235                | 758                   | 1000           | 300                     | 600 A A  |
| ● P245/75R16    | 111H          | 7.0J         | 248                | 774                   | 1090           | 300                     | 600 A A  |
| ● P265/75R16    | 116H          | 7.5J         | 267                | 804                   | 1250           | 300                     | 600 A A  |
| ● P215/60R17    | 96H           | 6.5J         | 221                | 690                   | 710            | 300                     | 400 AA A |
| ● P225/65R17    | 102H          | 6.5J         | 228                | 724                   | 850            | 300                     | 450 A A  |
| ● P235/65R17    | 104H          | 7.0J         | 240                | 738                   | 900            | 300                     | 450 A A  |
| ● P245/65R17    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | 600 A A  |
| ● P265/65R17    | 112H          | 8.0J         | 272                | 776                   | 1120           | 300                     | 600 A A  |
| ● P285/65R17    | 116H          | 8.5J         | 292                | 802                   | 1250           | 300                     | 600 A A  |
| ● P265/70R17    | 115H          | 8.0J         | 272                | 804                   | 1215           | 300                     | 600 A A  |
| ● P275/55R20 XL | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 600 A A  |

● Made in Thailand ● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 20 |
| SERIES       | 55 - 75 |
| SPEED RATING | T - V   |



### Benefits and Features

- All season, comfort ride tyre designed for highway application
- Asymmetric tread design provides various functions in different parts and enables a quieter ride

## SV308

| Size            | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    |
|-----------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|
| ● 245/30ZR20 XL | 90W           | 8.5J         | 248                | 656                   | 600            | 300                     | 360 A A |
| ● 275/45R20 XL  | 110H          | 9.0J         | 273                | 756                   | 1060           | 300                     | 460 A A |
| ● 285/50R20     | 112H          | 9.0J         | 297                | 794                   | 1120           | 300                     | 460 A A |
| ● 275/55R20 XL  | 117H          | 8.5J         | 284                | 810                   | 1285           | 300                     | 460 A A |
| ● 265/35R22     | 98H           | 9.5J         | 271                | 745                   | 750            | 300                     | 460 A A |
| ● 305/40R22     | 110H          | 11.0J        | 313                | 803                   | 1060           | 300                     | 460 A A |
| ● 305/45R22 XL  | 118H          | 10.0J        | 303                | 833                   | 1320           | 300                     | 460 A A |
| ● 305/35R24 XL  | 112H          | 11.0J        | 313                | 824                   | 1120           | 300                     | 460 A A |

● Made in Thailand



### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 20 - 24 |
| SERIES       | 30 - 55 |
| SPEED RATING | H - W   |



### Benefits and Features

- All season Silica-based compound for improving wet and dry traction without sacrificing tread wear
- RIM PROTECTOR protects the wheel rim and helps resist lateral deflection while providing superior handling control and enhanced cornering
- Circumferential V-groove promote proper water drainage without impacting cornering grip
- Solid center rib provides stable on-center feel and outstanding wet traction during cornering





## SL369

| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG        |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------------|
| 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 440 A A     |
| 175/80R14    | 88T           | 5.0J         | 177                | 636                   | 560            | 300                     | 440 A A     |
| P215/75R14   | 100T          | 6.0J         | 216                | 678                   | 800            | 300                     | 500 A A     |
| 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 500 A A     |
| 205/70R15    | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 500 A A     |
| 225/70R15    | 100T          | 6.5J         | 228                | 697                   | 800            | 300                     | 500 A A OWL |
| 265/70R15    | 112T          | 8.0J         | 272                | 753                   | 1120           | 300                     | 500 A A     |
| P215/75R15   | 100S          | 6.0J         | 216                | 703                   | 800            | 300                     | 500 A A OWL |
| 235/75R15 XL | 109S          | 6.5J         | 235                | 733                   | 1030           | 350                     | 500 A A OWL |
| 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 500 A A     |
| 235/60R16    | 100T          | 7.0J         | 240                | 688                   | 800            | 300                     | 500 A A     |
| 215/70R16    | 100S          | 6.5J         | 221                | 708                   | 800            | 300                     | 500 A A     |
| 225/70R16    | 103S          | 6.5J         | 228                | 722                   | 875            | 300                     | 500 A A     |
| 235/70R16    | 106S          | 7.0J         | 240                | 736                   | 950            | 300                     | 500 A A     |
| 245/70R16 XL | 111S          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A OWL |
| 255/70R16    | 111T          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A OWL |
| 265/70R16    | 112S          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A OWL |
| 275/70R16    | 114S          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A OWL |
| 225/75R16 XL | 108S          | 6.0J         | 223                | 744                   | 1000           | 350                     | 500 A A     |
| 235/75R16 XL | 112S          | 6.5J         | 235                | 758                   | 1120           | 350                     | 500 A A     |
| 245/75R16    | 111S          | 7.0J         | 248                | 774                   | 1090           | 300                     | 500 A A     |
| 265/75R16    | 116S          | 7.5J         | 267                | 804                   | 1250           | 300                     | 500 A A     |
| 205/80R16 XL | 104S          | 5.5J         | 203                | 734                   | 900            | 350                     | 440 A A     |
| 215/80R16 XL | 107S          | 6.0J         | 216                | 750                   | 975            | 350                     | 440 A A     |
| 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | 500 A A     |
| 235/65R17    | 104S          | 7.0J         | 240                | 738                   | 900            | 300                     | 500 A A     |
| 245/65R17    | 107S          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A     |
| 255/65R17    | 110T          | 7.5J         | 260                | 764                   | 1060           | 300                     | 500 A A     |
| 265/65R17    | 112S          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A OWL |
| 225/70R17 XL | 108S          | 6.5J         | 228                | 748                   | 1000           | 350                     | 500 A A     |
| 245/70R17    | 110T          | 7.0J         | 248                | 776                   | 1000           | 300                     | 500 A A     |
| 255/70R17    | 112T          | 7.5J         | 260                | 790                   | 1120           | 300                     | 500 A A     |
| 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | 500 A A OWL |
| 285/70R17    | 117T          | 8.5J         | 292                | 832                   | 1285           | 300                     | 500 A A     |
| 235/75R17    | 109T          | 6.5J         | 235                | 784                   | 1030           | 300                     | 500 A A     |
| 245/75R17    | 112T          | 7.0J         | 248                | 800                   | 1120           | 300                     | 500 A A     |
| 255/75R17    | 115T          | 7.0J         | 255                | 814                   | 1215           | 300                     | 500 A A     |
| 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A     |
| 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A     |
| 275/65R18    | 116T          | 8.0J         | 279                | 815                   | 1250           | 300                     | 500 A A     |
| 275/45R20 XL | 110H          | 9.0J         | 273                | 756                   | 1060           | 350                     | 500 A A     |
| 265/50R20 XL | 111T          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A     |
| 285/50R20 XL | 116V          | 9.0J         | 297                | 794                   | 1250           | 350                     | 500 A A     |
| 275/55R20    | 113S          | 8.5J         | 284                | 810                   | 1150           | 300                     | 500 A A     |
| 275/60R20    | 115T          | 8.0J         | 279                | 838                   | 1215           | 300                     | 500 A A     |

🇹🇭 Made in Thailand 🇨🇳 Made in China

## SL369

| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL  |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------|
| 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL OWL |
| 35x12.50R17LT | E/10PR | 121Q          | 10.0J        | 318                | 877                   | 1450           | 450                     | TL     |
| LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL     |
| LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 235                | 733                   | 1060/975       | 450                     | TL     |
| LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL     |
| LT265/70R16   | E/10PR | 121/118Q      | 8.0J         | 272                | 778                   | 1450/1320      | 550                     | TL OWL |
| LT305/70R16   | E/10PR | 124/121R      | 9.0J         | 311                | 834                   | 1600/1450      | 450                     | TL OWL |
| LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL     |
| LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL OWL |
| LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL OWL |
| LT285/75R16   | D/8PR  | 122/119Q      | 8.0J         | 286                | 834                   | 1500/1360      | 450                     | TL OWL |
| LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 834                   | 1700/1550      | 550                     | TL OWL |
| LT315/75R16   | E/10PR | 127/124R      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL     |
| LT205/80R16   | D/8PR  | 110/108S      | 5.5J         | 203                | 734                   | 1060/1000      | 450                     | TL OWL |
| LT215/85R16   | E/10PR | 115/112Q      | 6.0J         | 216                | 772                   | 1215/1120      | 550                     | TL     |
| LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL     |
| LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL     |
| LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL OWL |
| LT285/70R17   | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL     |
| LT285/70R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL     |
| LT315/70R17   | E/10PR | 121/118R      | 9.5J         | 323                | 874                   | 1450/1320      | 450                     | TL     |
| LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL     |
| LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL     |
| LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL     |
| LT275/70R18   | E/10PR | 125/122S      | 8.0J         | 279                | 843                   | 1650/1500      | 550                     | TL     |
| LT305/55R20   | E/10PR | 121/118R      | 9.5J         | 316                | 844                   | 1450/1320      | 450                     | TL     |
| LT275/65R20   | E/10PR | 126/123S      | 8.0J         | 279                | 866                   | 1700/1550      | 550                     | TL     |

🇹🇭 Made in Thailand 🇨🇳 Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 20 |
| SERIES       | 45 - 80 |
| SPEED RATING | S - V   |




### Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 20 |
| SERIES       | 55 - 85 |
| SPEED RATING | Q - S   |



### Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions





# SU327

| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG        |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------------|
| 225/70R15    | 100T          | 6.5J         | 228                | 697                   | 800            | 300                     | 500 A A     |
| 235/60R16    | 100T          | 7.0J         | 240                | 688                   | 800            | 300                     | 500 A A     |
| 245/70R16 XL | 111S          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A OWL |
| 265/70R16    | 112S          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A OWL |
| 265/65R17    | 112S          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A OWL |
| 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A OWL |

Made in Thailand
 Made in China

| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL  |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------|
| 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL OWL |
| LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL     |
| LT225/75R15   | C/6PR  | 102/99Q       | 6.0J         | 223                | 719                   | 850/775        | 350                     | TL     |
| LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL     |
| LT235/70R16   | D/8PR  | 110/107Q      | 7.0J         | 240                | 736                   | 1060/975       | 450                     | TL     |
| LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL     |
| LT255/70R16   | D/8PR  | 115/112Q      | 7.5J         | 260                | 764                   | 1215/1120      | 450                     | TL     |
| LT265/70R16   | E/10PR | 121/118Q      | 8.0J         | 272                | 778                   | 1450/1320      | 550                     | TL     |
| LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 780                   | 1380/1260      | 550                     | TL     |
| LT265/65R17   | E/10PR | 120/117R      | 8.0J         | 272                | 776                   | 1400/1285      | 550                     | TL     |

Made in Thailand
 Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 18 |
| SERIES       | 60 - 75 |
| SPEED RATING | Q - T   |



### Benefits and Features

- Wide tread and deep sipes increase surface area of tread and enhance traction on all the road conditions
- Robust shoulder blocks increase tread stiffness allowing for maximum wet and dry handling and stability
- Aggressive sidewall protectors increase unpaved tough road bite and prevent damage from sidewall cut

# SL366

| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 185R14C       | D/8PR  | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
| 195R14C       | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
| 205/70R15C    | C/6PR  | 104/102Q      | 6.0J         | 209                | 669                   | 900/850        | 375                     | TL    |
| 205R16C       | D/8PR  | 110/108Q      | 6.0J         | 208                | 736                   | 1060/1000      | 450                     | TL    |
| 30x9.50R15LT  | C/6PR  | 104Q          | 7.5J         | 240                | 756                   | 900            | 350                     | TL    |
| 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    |
| 32x11.50R15LT | C/6PR  | 113Q          | 9.0J         | 290                | 807                   | 1150           | 350                     | TL    |
| 33x12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    |
| 35x12.50R15LT | C/6PR  | 113Q          | 10.0J        | 318                | 883                   | 1150           | 250                     | TL    |
| 35x12.50R17LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
| 37x12.50R17LT | E/10PR | 124Q          | 10.0J        | 318                | 934                   | 1600           | 350                     | TL    |
| 35x12.50R18LT | E/10PR | 123Q          | 10.0J        | 318                | 883                   | 1550           | 450                     | TL    |
| 33x12.50R20LT | E/10PR | 114Q          | 10.0J        | 318                | 832                   | 1180           | 450                     | TL    |
| 35x12.50R20LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
| LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |
| LT225/75R15   | C/6PR  | 102/99Q       | 6.0J         | 223                | 719                   | 850/775        | 350                     | TL    |
| LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 739                   | 900/825        | 350                     | TL    |
| LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 235                | 739                   | 1060/975       | 450                     | TL    |
| LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 750                   | 1215/1120      | 550                     | TL    |
| LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 780                   | 1380/1260      | 550                     | TL    |
| LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |
| LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    |
| LT315/75R16   | E/10PR | 127/124R      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |
| LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 812                   | 1380/1260      | 550                     | TL    |
| LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 782                   | 1360/1250      | 550                     | TL    |
| LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 810                   | 1450/1320      | 550                     | TL    |
| LT285/70R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL    |
| LT315/70R17   | E/10PR | 121/118Q      | 9.5J         | 323                | 880                   | 1450/1320      | 450                     | TL    |

Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 20 |
| SERIES       | 70 - 85 |
| SPEED RATING | Q - R   |



### Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand





## SL386

| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    |
| 33×12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    |
| 35×12.50R17LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
| 37×12.50R17LT | D/8PR  | 124Q          | 10.0J        | 318                | 934                   | 1600           | 350                     | TL    |
| 35×12.50R18LT | E/10PR | 123Q          | 10.0J        | 318                | 883                   | 1550           | 450                     | TL    |
| 33×12.50R20LT | E/10PR | 114Q          | 10.0J        | 318                | 832                   | 1180           | 450                     | TL    |
| 35×12.50R20LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
| 37X12.50R20LT | E/10PR | 126Q          | 10.0J        | 318                | 934                   | 1700           | 450                     | TL    |
| 37X13.50R20LT | E/10PR | 127Q          | 11.0J        | 345                | 934                   | 1750           | 450                     | TL    |
| 35X12.50R22LT | E/10PR | 117Q          | 10.0J        | 318                | 883                   | 1285           | 450                     | TL    |
| 37X13.50R22LT | E/10PR | 123Q          | 11.0J        | 345                | 934                   | 1550           | 450                     | TL    |
| 40×15.50R24   | E/10PR | 128Q          | 12.5J        | 395                | 1010                  | 1800           | 450                     | TL    |
| 40×15.50R26   | E/10PR | 126Q          | 12.5J        | 395                | 1010                  | 1700           | 450                     | TL    |
| LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |
| LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    |
| LT315/75R16   | E/10PR | 127/124Q      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |
| LT305/65R17   | E/10PR | 121/118Q      | 9.0J         | 311                | 828                   | 1450/1320      | 450                     | TL    |
| LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
| LT285/70R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL    |
| LT315/70R17   | E/10PR | 121/118Q      | 9.5J         | 323                | 874                   | 1450/1320      | 450                     | TL    |
| LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
| LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
| LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |

🇹🇭 Made in Thailand

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 26 |
| SERIES       | 65 - 80 |
| SPEED RATING | Q       |



### Benefits and Features

- Premium tyres designed for unpaved tough road (Professional Off-Road tyres)
- Tri-Ply tyre carcass guarantees outstanding performance on any tough road conditions, especially mud and sand surface
- Robust tread blocks promise excellent traction on unpaved roads


## SL309

| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 185/75R16C    | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |
| 31×10.50R15LT | C/6PR  | 109 Q         | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
| LT215/75R15   | C/6PR  | 100/ 97Q      | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |
| LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
| LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL    |
| LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
| LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    |
| LT285/75R16   | D/8PR  | 122/119Q      | 8.0J         | 286                | 834                   | 1500/1360      | 450                     | TL    |
| LT215/85R16   | E/10PR | 115/112Q      | 6.0J         | 216                | 772                   | 1215/1120      | 550                     | TL    |
| LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
| LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
| LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
| LT285/70R17   | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL    |
| LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
| LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
| LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |

🇹🇭 Made in Thailand    🇨🇳 Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 18 |
| SERIES       | 65 - 85 |
| SPEED RATING | Q - R   |



### Benefits and Features

- All-season tread design with long tread life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves helps to evacuate water quickly and efficiently





## SC328

| Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL  |
|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------|
| 185R14C    | D/8PR  | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL     |
| 195R14C    | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL wsw |
| 205R14C    | D/8PR  | 109/107R      | 6.0J         | 208                | 686                   | 1030/975       | 450                     | TL     |
| 215R14C    | D/8PR  | 112/110Q      | 6.0J         | 218                | 700                   | 1120/1060      | 450                     | TL     |
| 205/70R14C | C/6PR  | 102/100R      | 6.0J         | 209                | 644                   | 850/800        | 375                     | TL     |
| 215/75R14C | D/8PR  | 112/110Q      | 6.0J         | 216                | 678                   | 1120/1060      | 475                     | TL     |
| 185R15C    | D/8PR  | 103/102R      | 5.5J         | 188                | 674                   | 875/850        | 450                     | TL     |
| 195R15C    | D/8PR  | 106/104R      | 5.5J         | 198                | 690                   | 950/900        | 450                     | TL     |
| 215R15C    | D/8PR  | 112/110Q      | 6.0J         | 218                | 724                   | 1120/1060      | 450                     | TL     |
| 205/65R15C | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL     |
| 195/70R15C | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL     |
| 205/70R15C | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL     |
| 215/70R15C | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL     |
| 225/70R15C | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL     |
| 175R16C    | C/6PR  | 98/96Q        | 5.0J         | 178                | 684                   | 750/710        | 375                     | TL     |
| 215/60R16C | D/8PR  | 108/106T      | 6.5J         | 221                | 664                   | 1000/950       | 475                     | TL     |
| 195/65R16C | D/8PR  | 104/102T      | 6.0J         | 201                | 660                   | 900/850        | 475                     | TL     |
| 205/65R16C | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL     |
| 215/65R16C | D/8PR  | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL     |
| 225/65R16C | D/8PR  | 112/110R      | 6.5J         | 228                | 698                   | 1120/1060      | 475                     | TL     |
| 235/65R16C | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL     |
| 215/70R16C | C/6PR  | 108/106T      | 6.5J         | 221                | 708                   | 1000/950       | 375                     | TL     |
| 215/70R16C | E/10PR | 113/111Q      | 6.5J         | 221                | 708                   | 1150/1090      | 585                     | TL     |
| 175/75R16C | D/8PR  | 101/99Q       | 5.0J         | 177                | 668                   | 825/775        | 475                     | TL     |
| 195/75R16C | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL     |
| 195/75R16C | E/10PR | 110/108R      | 5.5J         | 196                | 698                   | 1060/1000      | 525                     | TL     |
| 205/75R16C | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL     |
| 205/75R16C | E/10PR | 113/111R      | 5.5J         | 203                | 714                   | 1150/1090      | 525                     | TL     |
| 215/75R16C | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL     |
| 215/75R16C | E/10PR | 116/114R      | 6.0J         | 216                | 728                   | 1250/1180      | 525                     | TL     |

Made in Thailand
 Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 16 |
| SERIES       | 60 - 75 |
| SPEED RATING | Q - T   |



### Benefits and Features

- Wide four ribs improve miles to tread life
- Zig-zag grooves offers enhanced traction on wet road
- Combination construction of polyester casing and steel belts provide outstanding durability


## SL305

| Size       | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 155R12C    | C/6PR | 83/81Q        | 4.5B         | 157                | 550                   | 487/462        | 350                     | TL    |
| 155R12C    | D/8PR | 88/86Q        | 4.5B         | 157                | 550                   | 560/520        | 450                     | TL    |
| 155R13C    | D/8PR | 90/88S        | 4.5B         | 157                | 578                   | 600/560        | 450                     | TL    |
| 165R13C    | D/8PR | 94/92Q        | 4.5B         | 167                | 596                   | 670/630        | 450                     | TL    |
| 175R13C    | D/8PR | 97/95Q        | 5.0B         | 177                | 610                   | 730/690        | 450                     | TL    |
| 165/70R13C | C/6PR | 88/86S        | 5.0B         | 170                | 562                   | 560/530        | 375                     | TL    |
| 185R14C    | D/8PR | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
| 195R14C    | D/8PR | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
| 165/70R14C | C/6PR | 89/87R        | 5.0J         | 170                | 588                   | 580/545        | 375                     | TL    |
| 175/70R14C | C/6PR | 95/93S        | 5.0J         | 177                | 602                   | 690/650        | 375                     | TL    |

Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 12 - 14 |
| SERIES       | 70      |
| SPEED RATING | Q - S   |



### Benefits and Features

- Special design for mini-van and compact cars
- Combination construction of polyester casing and steel belts provide outstanding durability
- Long tyre life provides remarkable value for the end users





## SC326

| Size       | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 185R14C    | D/8PR | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
| 195R14C    | D/8PR | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
| 205R14C    | D/8PR | 109/107Q      | 6.0J         | 208                | 686                   | 1030/975       | 450                     | TL    |
| 215R14C    | D/8PR | 112/110Q      | 6.0J         | 218                | 700                   | 1120/1060      | 450                     | TL    |
| 215R15C    | D/8PR | 112/110Q      | 6.0J         | 218                | 724                   | 1120/1060      | 450                     | TL    |
| 205/70R15C | D/8PR | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL    |
| 215/70R15C | D/8PR | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL    |
| 225/75R15C | D/8PR | 116/114Q      | 6.0J         | 223                | 719                   | 1250/1180      | 475                     | TL    |
| 215/65R16C | D/8PR | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
| 215/70R16C | C/6PR | 108/106T      | 6.5J         | 221                | 708                   | 1000/950       | 375                     | TL    |

Made in Thailand

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 16 |
| SERIES       | 65 - 75 |
| SPEED RATING | Q - T   |



### Benefits and Features

- Balanced pattern arrangement for increased traction
- Latest profile design ensure longer tyre life
- Improved casing structure provides outstanding durability


## H188

| Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL  |
|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|--------|
| 155R12C    | C/6PR  | 83/81Q        | 4.5B         | 157                | 550                   | 487/462        | 350                     | TL     |
| 155R12C    | D/8PR  | 88/86Q        | 4.5B         | 157                | 550                   | 560/530        | 450                     | TL     |
| 155R13C    | D/8PR  | 90/88S        | 4.5B         | 157                | 578                   | 600/560        | 450                     | TL     |
| 165R13C    | C/6PR  | 91/89S        | 4.5B         | 167                | 596                   | 615/580        | 375                     | TL     |
| 165/70R13C | C/6PR  | 88/86S        | 5.0J         | 170                | 562                   | 560/530        | 375                     | TL     |
| 185R14C    | D/8PR  | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL WSW |
| 195R14C    | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL WSW |
| 175/70R14C | C/6PR  | 95/93S        | 5.0J         | 177                | 602                   | 690/650        | 375                     | TL     |
| 195R15C    | D/8PR  | 106/104R      | 5.5J         | 198                | 690                   | 950/900        | 450                     | TL WSW |
| 205/65R15C | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL     |
| 195/70R15C | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL     |
| 205/70R15C | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL     |
| 215/70R15C | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL     |
| 225/70R15C | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL     |
| 215/60R16C | D/8PR  | 108/106T      | 6.5J         | 221                | 664                   | 1000/950       | 475                     | TL     |
| 205/65R16C | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL     |
| 235/65R16C | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL     |
| 185/75R16C | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL     |
| 195/75R16C | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL     |
| 205/75R16C | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL     |
| 215/75R16C | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL     |
| 225/75R16C | E/10PR | 118/116R      | 6.0J         | 223                | 744                   | 1320/1250      | 525                     | TL     |

Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 12 - 16 |
| SERIES       | 60 - 75 |
| SPEED RATING | Q - T   |



### Benefits and Features

- Valuable commercial light truck tyre for vehicles on paved roads
- 5 rib grooves provides improved handling and comfort
- Polyester tyre casing with steel belts for good durability





# ST313

| Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 6.50R15LT   | E/10PR | 107/105N      | 5.5F         | 180                | 730                   | 975/925        | 560                     | TT/TL |
| 7.00R15LT   | E/10PR | 110/106N      | 5.5F         | 200                | 750                   | 1060/950       | 560                     | TT/TL |
| 6.50R16LT   | E/10PR | 108/107N      | 5.5F         | 185                | 750                   | 1000/975       | 560                     | TT/TL |
| 7.00R16LT   | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1285/1250      | 670                     | TT/TL |
| 7.00R16LT   | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1285/1250      | 670                     | TT/TL |
| 7.50R16LT   | G/14PR | 122/121L      | 6.0G         | 220                | 808                   | 1500/1450      | 740                     | TT/TL |
| 185/85R16LT | F/12PR | 111/109L      | 5.0J         | 184                | 720                   | 1090/1030      | 600                     | TL    |
| 195/85R16LT | F/12PR | 114/112L      | 5.5J         | 196                | 738                   | 1180/1120      | 600                     | TL    |
| 205/85R16LT | F/12PR | 117/115L      | 5.5J         | 203                | 754                   | 1285/1215      | 600                     | TL    |

● Made in China

## M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 16 |
| SERIES       | 85      |
| SPEED RATING | L - N   |



### Benefits and Features

- Applicable for mini-bus, van and commercial light trucks
- Strong sidewall design enables high durability and fights off cuts and abrasion in city roads
- Triply polyester belts plies creates strength bearing heavy loads with superior stability

# ST303



| Size      | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|-----------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 6.50R15LT | E/10PR | 107/105N      | 5.5F         | 180                | 730                   | 975/925        | 560                     | TT/TL |
| 7.00R15LT | E/10PR | 110/106N      | 5.5F         | 200                | 750                   | 1060/950       | 560                     | TT/TL |
| 6.50R16LT | E/10PR | 108/107N      | 5.5F         | 185                | 750                   | 1000/975       | 560                     | TT/TL |
| 7.00R16LT | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1285/1250      | 670                     | TT/TL |

● Made in China



## M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 16 |
| SERIES       | -       |
| SPEED RATING | N       |



### Benefits and Features

- Five rib design for improved handling and wet traction
- Combination of polyester casing and steel belts increases durability
- Wide tread width and low-heating compound ensure longer tyre life





## CR857+



| Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
| LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
| LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL    |
| LT245/75R16   | E/10PR | 120/116L      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
| LT265/75R16   | E/10PR | 123/120L      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    |
| LT235/85R16   | E/10PR | 120/116L      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
| LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
| LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
| LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
| LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |

• Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 18 |
| SERIES       | 65 - 85 |
| SPEED RATING | L - Q   |



### Benefits and Features

- Bold, off-road attitude combined with exceptional on-road performance
- Staggered center blocks create more biting edges helping improve off-road performance
- Studable for outstanding traction and braking performance on snow and icy roads

## SW658




| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 215/75R15    | 100T          | 6.0J         | 216                | 703                   | 800            | 300                     | TL    |
| 225/75R15    | 102T          | 6.0J         | 223                | 719                   | 850            | 300                     | TL    |
| 235/75R15    | 105T          | 6.5J         | 235                | 733                   | 925            | 300                     | TL    |
| 235/60R16    | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | TL    |
| 215/65R16    | 98T           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
| 215/70R16    | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | TL    |
| 225/70R16    | 103T          | 6.5J         | 228                | 722                   | 875            | 300                     | TL    |
| 235/70R16    | 106T          | 7.0J         | 240                | 736                   | 950            | 300                     | TL    |
| 245/70R16    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |
| 265/70R16    | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | TL    |
| 225/45R17    | 91H           | 7.5J         | 225                | 634                   | 615            | 300                     | TL    |
| 215/60R17    | 96T           | 6.5J         | 221                | 690                   | 710            | 300                     | TL    |
| 225/60R17    | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
| 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |
| 235/65R17    | 104T          | 7.0J         | 240                | 738                   | 900            | 300                     | TL    |
| 245/65R17    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |
| 265/65R17    | 112T          | 8.0J         | 272                | 776                   | 1120           | 300                     | TL    |
| 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | TL    |
| 235/55R18 XL | 104H          | 7.5J         | 245                | 715                   | 900            | 350                     | TL    |
| 255/55R18 XL | 109H          | 8.0J         | 265                | 737                   | 1030           | 350                     | TL    |
| 225/60R18 XL | 104V          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
| 235/60R18 XL | 107T          | 7.0J         | 240                | 739                   | 975            | 350                     | TL    |
| 285/60R18    | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | TL    |
| 255/50R19 XL | 107H          | 8.0J         | 265                | 739                   | 975            | 350                     | TL    |

• Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 15 - 19 |
| SERIES       | 45 - 75 |
| SPEED RATING | T - V   |



### Benefits and Features

- New studless winter tyres for SUV/CUV vehicles promise excellent performance on snow and wet road surface
- Special V-shape pattern with solid center rib guarantees outstanding traction on snow, slush and wet road.
- SILICA TECH compound offers remarkable traction and longer tread life





# SW618



| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 155/65R13    | 73T           | 4.5J         | 157                | 532                   | 365            | 300                     | TL    |
| 165/65R13    | 77T           | 5.0J         | 170                | 544                   | 412            | 300                     | TL    |
| 165/70R13    | 79T           | 5.0J         | 170                | 562                   | 437            | 300                     | TL    |
| 175/70R13    | 82T           | 5.0J         | 177                | 576                   | 475            | 300                     | TL    |
| 165/60R14    | 75T           | 5.0J         | 170                | 554                   | 387            | 300                     | TL    |
| 185/60R14    | 82T           | 5.5J         | 189                | 578                   | 475            | 300                     | TL    |
| 155/65R14    | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | TL    |
| 175/65R14    | 82T           | 5.0J         | 177                | 584                   | 475            | 300                     | TL    |
| 185/65R14    | 86T           | 5.5J         | 189                | 596                   | 530            | 300                     | TL    |
| 165/70R14    | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | TL    |
| 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | TL    |
| 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | TL    |
| 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | TL    |
| 195/50R15    | 82T           | 6.0J         | 201                | 577                   | 475            | 300                     | TL    |
| 185/55R15    | 82T           | 6.0J         | 194                | 585                   | 475            | 300                     | TL    |
| 195/55R15    | 85H           | 6.0J         | 201                | 595                   | 515            | 300                     | TL    |
| 185/60R15    | 84T           | 5.5J         | 189                | 603                   | 500            | 300                     | TL    |
| 195/60R15    | 88T           | 6.0J         | 201                | 615                   | 560            | 300                     | TL    |
| 185/65R15    | 88T           | 5.5J         | 189                | 621                   | 560            | 300                     | TL    |
| 195/65R15    | 91T           | 6.0J         | 201                | 635                   | 615            | 300                     | TL    |
| 205/65R15    | 94T           | 6.0J         | 209                | 647                   | 670            | 300                     | TL    |
| 205/70R15    | 96T           | 6.0J         | 209                | 669                   | 710            | 300                     | TL    |
| 215/70R15    | 98T           | 6.5J         | 221                | 683                   | 750            | 300                     | TL    |
| 195/55R16 XL | 91V           | 6.0J         | 201                | 620                   | 615            | 350                     | TL    |
| 205/55R16    | 91H           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |
| 215/55R16    | 93T           | 7.0J         | 226                | 642                   | 650            | 300                     | TL    |
| 225/55R16    | 95T           | 7.0J         | 233                | 654                   | 690            | 300                     | TL    |
| 195/60R16    | 89T           | 6.0J         | 201                | 640                   | 580            | 300                     | TL    |
| 205/60R16    | 92T           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |
| 215/60R16    | 95T           | 6.5J         | 221                | 664                   | 690            | 300                     | TL    |
| 225/60R16    | 98T           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 205/65R16    | 95T           | 6.0J         | 209                | 672                   | 690            | 300                     | TL    |
| 215/65R16    | 98T           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
| 225/65R16    | 100T          | 6.5J         | 228                | 698                   | 800            | 300                     | TL    |
| 215/45R17 XL | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
| 235/45R17 XL | 97T           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |
| 215/50R17 XL | 95H           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |
| 225/50R17    | 94T           | 7.0J         | 233                | 658                   | 670            | 300                     | TL    |
| 235/50R17 XL | 100H          | 7.5J         | 245                | 668                   | 800            | 350                     | TL    |
| 215/55R17    | 94T           | 7.0J         | 226                | 668                   | 670            | 300                     | TL    |
| 225/55R17 XL | 101H          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
| 225/55R17 XL | 101H          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
| 235/55R17    | 99T           | 7.5J         | 245                | 690                   | 775            | 300                     | TL    |
| 225/60R17    | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
| 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |
| 235/65R17    | 104T          | 7.0J         | 240                | 738                   | 900            | 300                     | TL    |
| 235/40R18 XL | 95V           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |
| 225/45R18 XL | 95H           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
| 235/45R18 XL | 98T           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
| 245/45R18 XL | 100T          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
| 245/45R18 XL | 100T          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
| 235/50R18 XL | 101T          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
| 245/50R18 XL | 104T          | 7.5J         | 253                | 703                   | 900            | 350                     | TL    |
| 215/55R18 XL | 99H           | 7.0J         | 226                | 693                   | 775            | 350                     | TL    |
| 225/55R18    | 98H           | 7.0J         | 233                | 705                   | 750            | 300                     | TL    |
| 235/55R18 XL | 104T          | 7.5J         | 245                | 715                   | 900            | 350                     | TL    |
| 245/60R18    | 105H          | 7.0J         | 248                | 751                   | 925            | 300                     | TL    |
| 235/50R19    | 99H           | 7.5J         | 245                | 719                   | 775            | 300                     | TL    |
| 235/55R19 XL | 105H          | 7.5J         | 245                | 741                   | 925            | 350                     | TL    |
| 255/55R19 XL | 111H          | 8.0J         | 265                | 763                   | 1090           | 350                     | TL    |
| 275/30R20 XL | 97H           | 9.5J         | 278                | 674                   | 730            | 350                     | TL    |
| 275/45R20 XL | 110H          | 9.0J         | 273                | 756                   | 1060           | 350                     | TL    |
| 255/50R20 XL | 109H          | 8.0J         | 265                | 764                   | 1030           | 350                     | TL    |

● Made in China ZC Rubber RunFlat Tyres

# SW608



| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 155/70R13    | 75T           | 4.5B         | 157                | 548                   | 387            | 300                     | TL    |
| 165/70R13    | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | TL    |
| 175/70R13    | 82T           | 5.0B         | 177                | 576                   | 475            | 350                     | TL    |
| 155/80R13    | 79T           | 4.5B         | 157                | 578                   | 437            | 300                     | TL    |
| 185/60R14    | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | TL    |
| 195/60R14    | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | TL    |
| 155/65R14    | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | TL    |
| 175/65R14    | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | TL    |
| 185/65R14    | 86H           | 5.5J         | 189                | 596                   | 530            | 350                     | TL    |
| 165/70R14    | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | TL    |
| 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | TL    |
| 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | TL    |
| 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | TL    |
| 185/55R15 XL | 86HV          | 6.0J         | 194                | 585                   | 530            | 350                     | TL    |
| 195/55R15 XL | 89H           | 6.0J         | 201                | 595                   | 580            | 350                     | TL    |
| 185/60R15 XL | 88H           | 5.5J         | 189                | 603                   | 560            | 350                     | TL    |
| 195/60R15    | 88H           | 6.0J         | 201                | 615                   | 560            | 300                     | TL    |
| 175/65R15    | 84T           | 5.0J         | 177                | 609                   | 500            | 300                     | TL    |
| 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | TL    |
| 195/65R15    | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | TL    |
| 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | TL    |
| 215/70R15    | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | TL    |
| 195/50R16 XL | 88H           | 6.0J         | 201                | 602                   | 560            | 350                     | TL    |
| 225/50R16 XL | 96V           | 7.0J         | 233                | 632                   | 710            | 350                     | TL    |
| 195/55R16    | 87H           | 6.0J         | 201                | 620                   | 545            | 300                     | TL    |
| 205/55R16    | 91H           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |
| 215/55R16 XL | 97H           | 7.0J         | 226                | 642                   | 730            | 350                     | TL    |
| 225/55R16 XL | 99H           | 7.0J         | 233                | 654                   | 775            | 350                     | TL    |
| 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |
| 215/60R16 XL | 99H           | 6.5J         | 221                | 664                   | 775            | 350                     | TL    |
| 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
| 205/40R17 XL | 84V           | 7.5J         | 212                | 596                   | 500            | 350                     | TL    |
| 215/40R17 XL | 87V           | 7.5J         | 218                | 604                   | 545            | 350                     | TL    |
| 245/40R17 XL | 95V           | 8.5J         | 248                | 628                   | 690            | 350                     | TL    |
| 205/45R17 XL | 88V           | 7.0J         | 206                | 616                   | 560            | 350                     | TL    |
| 215/45R17 XL | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
| 225/45R17 XL | 94V           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |
| 235/45R17 XL | 97H           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |
| 245/45R17 XL | 99V           | 8.0J         | 243                | 652                   | 775            | 350                     | TL    |
| 205/50R17 XL | 93H           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |
| 215/50R17 XL | 95V           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |
| 225/50R17 XL | 98H           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |
| 215/55R17 XL | 98V           | 7.0J         | 226                | 668                   | 750            | 350                     | TL    |
| 225/55R17 XL | 101V          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
| 235/55R17 XL | 103V          | 7.5J         | 245                | 690                   | 875            | 350                     | TL    |
| 215/60R17    | 96H           | 6.5J         | 221                | 690                   | 710            | 300                     | TL    |
| 225/60R17    | 99H           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
| 235/65R17 XL | 108H          | 7.0J         | 240                | 738                   | 1000           | 350                     | TL    |
| 225/40R18 XL | 92V           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |
| 235/40R18 XL | 95V           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |
| 245/40R18 XL | 97V           | 8.5J         | 248                | 653                   | 730            | 350                     | TL    |
| 225/45R18 XL | 95V           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
| 235/45R18 XL | 98V           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
| 245/45R18 XL | 100V          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
| 225/50R18 XL | 99V           | 7.0J         | 233                | 683                   | 775            | 350                     | TL    |
| 235/50R18 XL | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
| 245/50R18 XL | 104V          | 7.5J         | 253                | 703                   | 900            | 350                     | TL    |
| 225/60R18 XL | 104V          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
| 225/35R19 XL | 88V           | 8.0J         | 230                | 641                   | 560            | 350                     | TL    |
| 235/45R19 XL | 99V           | 8.0J         | 236                | 695                   | 775            | 350                     | TL    |
| 245/45R19 XL | 102V          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |
| 245/30R20 XL | 90V           | 8.5J         | 248                | 656                   | 600            | 350                     | TL    |

● Made in China

## M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 20 |
| SERIES       | 40 - 70 |
| SPEED RATING | T - V   |



### Benefits and Features

- Premium studless winter tyre providing excellent snow, slush and wet traction in cold climates
- Special pattern design to promote aggressive bite in deep snow and wet road conditions
- Superior tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

## M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 13 - 20 |
| SERIES       | 35 - 80 |
| SPEED RATING | Q - V   |



### Benefits and Features

- V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly
- Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions
- Special winter tread compound offers performance driving





## ZuperSnow Z-507

| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 205/55R16    | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |
| 215/55R16 XL | 97H           | 7.0J         | 226                | 642                   | 730            | 350                     | TL    |
| 225/55R16 XL | 99V           | 7.0J         | 233                | 654                   | 775            | 350                     | TL    |
| 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |
| 215/60R16 XL | 99H           | 6.5J         | 221                | 664                   | 775            | 350                     | TL    |
| 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
| 215/45R17 XL | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
| 225/45R17 XL | 94V           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |
| 235/45R17 XL | 97V           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |
| 205/50R17 XL | 93V           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |
| 225/50R17 XL | 98V           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |
| 225/55R17 XL | 101V          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
| 225/40R18 XL | 92V           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |
| 225/45R18 XL | 95V           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
| 235/45R18 XL | 98V           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
| 245/45R18 XL | 100V          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
| 225/35R19 XL | 88V           | 8.0J         | 230                | 641                   | 560            | 350                     | TL    |
| 235/45R19 XL | 99V           | 8.0J         | 236                | 695                   | 775            | 350                     | TL    |
| 245/45R19 XL | 102V          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |

● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 16 - 19 |
| SERIES       | 35 - 65 |
| SPEED RATING | H - V   |



### Benefits and Features

- Asymmetric pattern design provides superior handling on snow surface
- Optimised lateral groove angle offers strong snow performance
- Special zigzag traction sipes improves traction and braking performance on snow roads

## SW612

| Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 6.50R16    | E/10PR | 108/107N      | 5.5F         | 185                | 750                   | 1000/975       | 560                     | TL    |
| 7.00R16    | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1258/1250      | 670                     | TL    |
| 155R12C    | D/8PR  | 88/86Q        | 4.5B         | 157                | 550                   | 560/530        | 450                     | TL    |
| 155R13C    | C/6PR  | 85/83Q        | 4.5J         | 157                | 578                   | 515/487        | 350                     | TL    |
| 165R13C    | C/6PR  | 91/89Q        | 4.5B         | 165                | 594                   | 615/580        | 450                     | TL    |
| 175R13C    | D/8PR  | 97/95Q        | 5.0B         | 177                | 610                   | 730/690        | 450                     | TL    |
| 185R14C    | D/8PR  | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
| 175/70R14C | C/6PR  | 95/93Q        | 5.0J         | 177                | 602                   | 690/650        | 375                     | TL    |
| 195R15C    | D/8PR  | 106/104R      | 5.5J         | 196                | 693                   | 950/900        | 450                     | TL    |
| 205/65R15C | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL    |
| 195/70R15C | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    |
| 205/70R15C | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 450                     | TL    |
| 215/70R15C | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 450                     | TL    |
| 225/70R15C | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL    |
| 195/60R16C | C/6PR  | 99/97T        | 6.0J         | 201                | 640                   | 775/730        | 375                     | TL    |
| 195/65R16C | D/8PR  | 104/102T      | 6.0J         | 201                | 660                   | 900/850        | 475                     | TL    |
| 205/65R16C | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL    |
| 215/65R16C | D/8PR  | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
| 225/65R16C | D/8PR  | 112/110R      | 6.5J         | 228                | 698                   | 1120/1060      | 475                     | TL    |
| 235/65R16C | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL    |
| 185/75R16C | D/8PR  | 104/102Q      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |
| 195/75R16C | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL    |
| 205/75R16C | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL    |
| 215/75R16C | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL    |
| 225/75R16C | E/10PR | 118/116Q      | 6.0J         | 223                | 744                   | 1320/1250      | 525                     | TL    |

● Made in China

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 12 - 16 |
| SERIES       | 60 - 75 |
| SPEED RATING | N - T   |



### Benefits and Features

- All-round winter performance for vans and other commercial vehicles
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life





# SW606



| Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 185/60R14    | 82T           | 5.5J         | 189                | 578                   | 475            | 300                     | TL    |
| 175/65R14    | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | TL    |
| 185/65R14    | 86T           | 5.5J         | 189                | 596                   | 530            | 300                     | TL    |
| 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | TL    |
| 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | TL    |
| 185/60R15    | 84T           | 5.5J         | 189                | 603                   | 500            | 300                     | TL    |
| 195/60R15    | 88T           | 6.0J         | 201                | 615                   | 560            | 300                     | TL    |
| 185/65R15    | 88T           | 5.5J         | 189                | 621                   | 560            | 300                     | TL    |
| 195/65R15    | 91T           | 6.0J         | 201                | 635                   | 615            | 300                     | TL    |
| 205/65R15    | 94T           | 6.0J         | 209                | 647                   | 670            | 300                     | TL    |
| 215/70R15    | 98T           | 6.5J         | 221                | 683                   | 750            | 300                     | TL    |
| 205/55R16    | 91T           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |
| 205/60R16    | 92T           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |
| 215/60R16    | 95T           | 6.5J         | 221                | 664                   | 690            | 300                     | TL    |
| 225/60R16    | 98T           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 215/65R16    | 98T           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
| 215/70R16    | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | TL    |
| 225/70R16    | 103T          | 6.5J         | 228                | 722                   | 875            | 300                     | TL    |
| 235/70R16    | 106T          | 7.0J         | 240                | 736                   | 950            | 300                     | TL    |
| 245/70R16    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |
| 265/70R16    | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | TL    |
| 215/45R17 XL | 91H           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
| 225/45R17 XL | 94H           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |
| 205/50R17 XL | 93H           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |
| 215/50R17 XL | 95H           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |
| 225/50R17 XL | 98H           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |
| 225/55R17 XL | 101H          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
| 225/60R17    | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
| 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |
| 235/65R17    | 104T          | 7.0J         | 240                | 738                   | 900            | 300                     | TL    |
| 245/65R17    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |
| 245/70R17    | 110T          | 7.0J         | 248                | 776                   | 1060           | 300                     | TL    |
| 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | TL    |
| 225/40R18 XL | 92H           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |
| 225/50R18 XL | 99H           | 7.0J         | 233                | 683                   | 775            | 350                     | TL    |
| 235/50R18 XL | 101H          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
| 215/55R18 XL | 99H           | 7.0J         | 226                | 693                   | 775            | 350                     | TL    |
| 225/55R18 XL | 102H          | 7.0J         | 233                | 705                   | 850            | 350                     | TL    |
| 225/60R18 XL | 104H          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
| 235/60R18 XL | 107H          | 7.0J         | 240                | 739                   | 975            | 350                     | TL    |
| 245/60R18    | 105T          | 7.0J         | 248                | 751                   | 925            | 300                     | TL    |
| 275/65R18    | 116T          | 8.0J         | 279                | 815                   | 1250           | 300                     | TL    |
| 275/55R20 XL | 117H          | 8.5J         | 284                | 810                   | 1285           | 350                     | TL    |
| 275/60R20    | 115T          | 8.0J         | 279                | 838                   | 1215           | 300                     | TL    |

### M+S

|              |         |
|--------------|---------|
| RIM SIZE     | 14 - 20 |
| SERIES       | 40 - 75 |
| SPEED RATING | R - H   |



### Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

# STZC ST100 CR960A

- Double steel belts for enhanced strength helping puncture resistance and vehicle towing stability
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- Full nylon cap available in all sizes for improved tyre strength and durability (STZC/ST100 only)



### STZC

| Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| ST175/80R13 | C/6PR  | 91/87L        | 5.0J         | 177                | 610                   | 615/545        | 350                     | TL    |
| ST185/80R13 | D/8PR  | 99/95L        | 5.0J         | 184                | 626                   | 775/690        | 450                     | TL    |
| ST205/75R14 | C/6PR  | 100/96L       | 5.5J         | 203                | 664                   | 800/710        | 350                     | TL    |
| ST215/75R14 | C/6PR  | 102/98L       | 5.5J         | 203                | 689                   | 850/750        | 350                     | TL    |
| ST205/75R15 | C/6PR  | 101/97L       | 5.5J         | 203                | 689                   | 825/730        | 350                     | TL    |
| ST205/75R15 | D/8PR  | 107/102L      | 6.0J         | 216                | 678                   | 975/850        | 450                     | TL    |
| ST225/75R15 | C/6PR  | 107/102L      | 6.0J         | 223                | 719                   | 975/850        | 350                     | TL    |
| ST225/75R15 | D/8PR  | 113/108L      | 6.0J         | 223                | 719                   | 1150/1000      | 450                     | TL    |
| ST225/75R15 | E/10PR | 117/112L      | 6.0J         | 223                | 719                   | 1285/1120      | 550                     | TL    |
| ST235/80R16 | E/10PR | 124/120L      | 6.5J         | 235                | 782                   | 1600/1400      | 550                     | TL    |
| ST235/85R16 | F/12PR | 128/124L      | 6.5J         | 235                | 806                   | 1800/1600      | 660                     | TL    |
| ST225/90R16 | D/8PR  | 121/117L      | 6.0J         | 220                | 808                   | 1450/1285      | 450                     | TL    |

Made in China

### ST100

| Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| ST175/80R13 | C/6PR  | 91/87M        | 5.0J         | 177                | 610                   | 615/545        | 350                     | TL    |
| ST205/75R14 | C/6PR  | 100/96M       | 5.5J         | 203                | 664                   | 800/710        | 350                     | TL    |
| ST205/75R15 | C/6PR  | 101/97M       | 5.5J         | 203                | 689                   | 825/730        | 350                     | TL    |
| ST205/75R15 | D/8PR  | 107/102M      | 5.5J         | 203                | 689                   | 975/850        | 450                     | TL    |
| ST225/75R15 | C/6PR  | 107/102M      | 6.0J         | 223                | 719                   | 975/2150       | 350                     | TL    |
| ST225/75R15 | D/8PR  | 113/108M      | 6.0J         | 223                | 719                   | 1150/1000      | 450                     | TL    |
| ST225/75R15 | E/10PR | 117/112M      | 6.0J         | 223                | 719                   | 1285/1120      | 550                     | TL    |
| ST235/80R16 | E/10PR | 124/120M      | 6.5J         | 235                | 782                   | 1600/1400      | 550                     | TL    |

Made in China

### CR960A



| Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| ST235/80R16 | G/14PR | 129/125L      | 6½J          | 235                | 782                   | 1850/1650      | 760                     | TL    |
| ST235/85R16 | G/14PR | 132/127L      | 6½J          | 235                | 806                   | 2000/1750      | 760                     | TL    |

Made in China




# TYRE SIZE KNOWLEDGE

## 225/40ZR18 92W

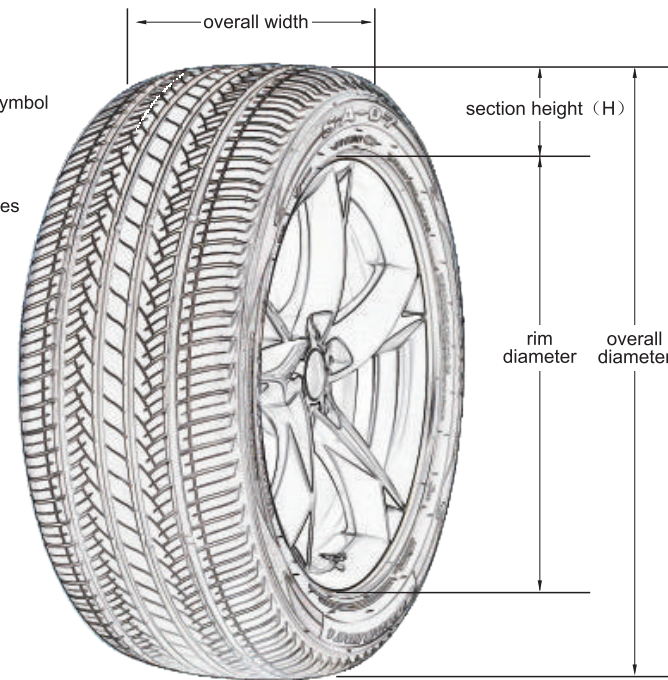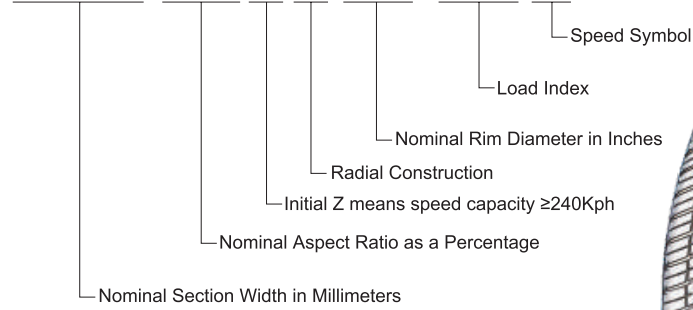

$$\text{Aspect ratio (\%)} = \frac{\text{Section Height}}{\text{Section Width}} \times 100$$

### SIDEWALL INSTRUCTION:

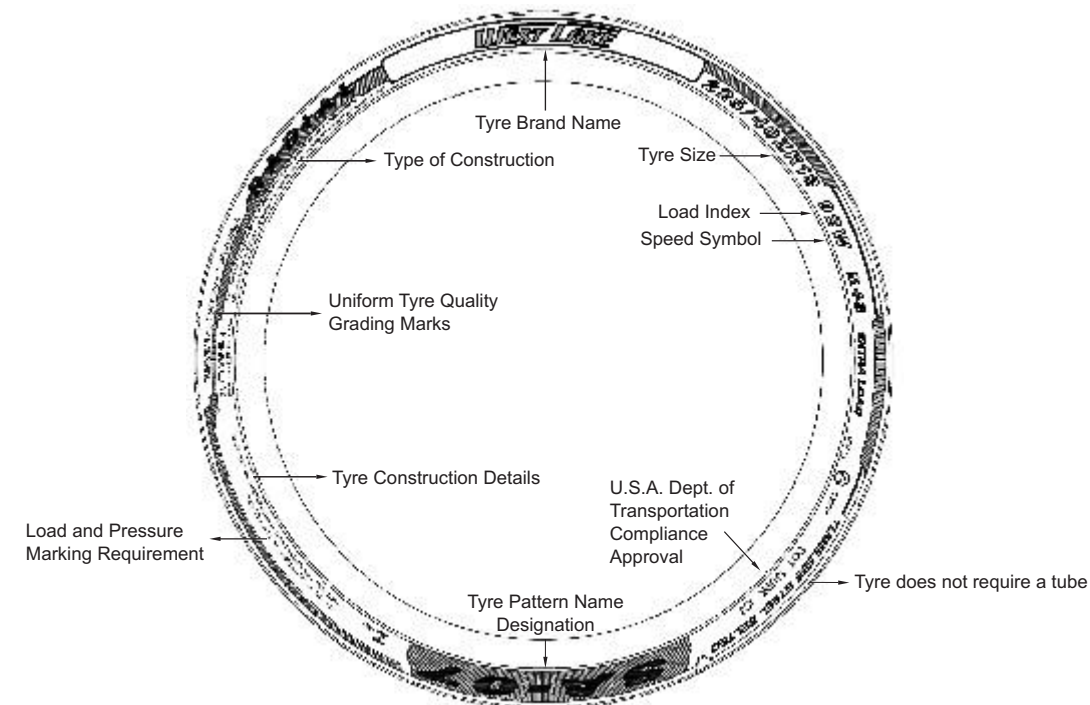

### OTHER MARKINGS:

- P - as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
- LT - as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
- M&S - letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
- XL - as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
- ZR - as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

# SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

| Speed Rating               | L   | N   | P   | Q   | R   | S   | T   | U   | H   | V   | W   | Y   | ZR   |
|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Max. Kph. (Kilometer/hour) | 120 | 140 | 150 | 160 | 170 | 180 | 190 | 200 | 210 | 240 | 270 | 300 | ≥240 |

# LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

| Load Index | KG  | LBS | Load Index | KG  | LBS  | Load Index | KG   | LBS  | Load Index | KG   | LBS  | Load Index | KG   | LBS  |
|------------|-----|-----|------------|-----|------|------------|------|------|------------|------|------|------------|------|------|
| 50         | 190 | 420 | 70         | 335 | 740  | 90         | 600  | 1320 | 110        | 1060 | 2340 | 130        | 1900 | 4180 |
| 51         | 195 | 430 | 71         | 345 | 760  | 91         | 615  | 1360 | 111        | 1090 | 2400 | 131        | 1950 | 4300 |
| 52         | 200 | 440 | 72         | 355 | 785  | 92         | 630  | 1390 | 112        | 1120 | 2470 | 132        | 2000 | 4400 |
| 53         | 206 | 455 | 73         | 365 | 805  | 93         | 650  | 1430 | 113        | 1150 | 2540 | 133        | 2060 | 4540 |
| 54         | 212 | 465 | 74         | 375 | 825  | 94         | 670  | 1480 | 114        | 1180 | 2600 | 134        | 2120 | 4680 |
| 55         | 218 | 480 | 75         | 387 | 855  | 95         | 690  | 1520 | 115        | 1215 | 2680 | 135        | 2180 | 4800 |
| 56         | 224 | 495 | 76         | 400 | 880  | 96         | 710  | 1570 | 116        | 1250 | 2760 | 136        | 2240 | 4940 |
| 57         | 230 | 505 | 77         | 412 | 910  | 97         | 730  | 1610 | 117        | 1285 | 2830 | 137        | 2300 | 5080 |
| 58         | 236 | 520 | 78         | 425 | 935  | 98         | 750  | 1650 | 118        | 1320 | 2910 | 138        | 2360 | 5200 |
| 59         | 243 | 535 | 79         | 437 | 965  | 99         | 775  | 1710 | 119        | 1360 | 3000 | 139        | 2430 | 5360 |
| 60         | 250 | 550 | 80         | 450 | 990  | 100        | 800  | 1760 | 120        | 1400 | 3080 | 140        | 2500 | 5520 |
| 61         | 257 | 565 | 81         | 462 | 1020 | 101        | 825  | 1820 | 121        | 1450 | 3200 | 141        | 2575 | 5680 |
| 62         | 265 | 585 | 82         | 475 | 1050 | 102        | 850  | 1870 | 122        | 1500 | 3300 | 142        | 2650 | 5840 |
| 63         | 272 | 600 | 83         | 487 | 1070 | 103        | 875  | 1930 | 123        | 1550 | 3420 | 143        | 2725 | 6000 |
| 64         | 280 | 615 | 84         | 500 | 1100 | 104        | 900  | 1980 | 124        | 1600 | 3520 | 144        | 2800 | 6150 |
| 65         | 290 | 640 | 85         | 515 | 1140 | 105        | 925  | 2040 | 125        | 1650 | 3640 | 145        | 2900 | 6400 |
| 66         | 300 | 660 | 86         | 530 | 1170 | 106        | 950  | 2090 | 126        | 1700 | 3740 | 146        | 3000 | 6600 |
| 67         | 307 | 675 | 87         | 545 | 1200 | 107        | 975  | 2150 | 127        | 1750 | 3860 | 147        | 3075 | 6800 |
| 68         | 315 | 695 | 88         | 560 | 1230 | 108        | 1000 | 2200 | 128        | 1800 | 3960 | 148        | 3150 | 6950 |
| 69         | 325 | 715 | 89         | 580 | 1280 | 109        | 1030 | 2270 | 129        | 1850 | 4080 | 149        | 3250 | 7150 |

# TYRE UPGRADE


"Tyre Upgrade" means: increase of rim diameter without changing of tyre overall diameter, the trend in development of low aspect ratio is called upgrade.

### INCREASE OF SPORTY PERFORMANCE

The tyre response will be more sensitive when you turn the steering wheel that the flex of tyre will be reduced, and the performance of steering and handling stability will be better, especially under medium and high speed driving.

### ENHANCEMENT OF BRAKING ABILITY

The braking stability will be improved due to the decrease of tyre flex when you brake.

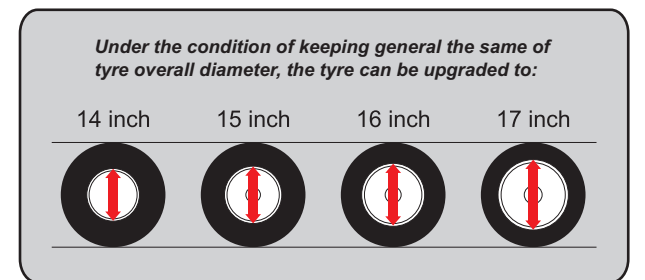

Please refer to the clarifications set forth below to upgrade the tyre:

- Without any particular reason, please do not change the overall diameter of tyre easily. The alternation of tyre overall diameter will cause misreading of speedometer or mutual interference between tyre and other parts of vehicle.
- Please determine the width of tyre in accordance with the specific width of vehicle. If the width of the entire tyre is increased overly, it will cause mutual interference between tyre and other parts of vehicle, even heading out of the tyre from bodywork which will initiate danger.
- Notice the load index of vehicle when you upgrade the tyre. There is rule to the weight which the tyre can bear (load index) for each size. Please refer to the load index when you chose the proper size.



## TYRE ROTATION AND INFLATION


### TYRE ROTATION:

The purpose for rotating tyres is to achieve a more uniform wear for all tyres on a vehicle. Before rotating tyres, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.

Otherwise it will cause: 1. Ride disturbing; 2. More noise; 3. Poor ride comfort; 4. Shorter of life span.

**Note: it is suggested that tyres should be transposed as soon as the phenomena above mentioned are detected (especially the two front wheels).**

The tyre transposition patterns are acceptable below. Please refer to your vehicle owner's manual regarding tyre transposition advice.

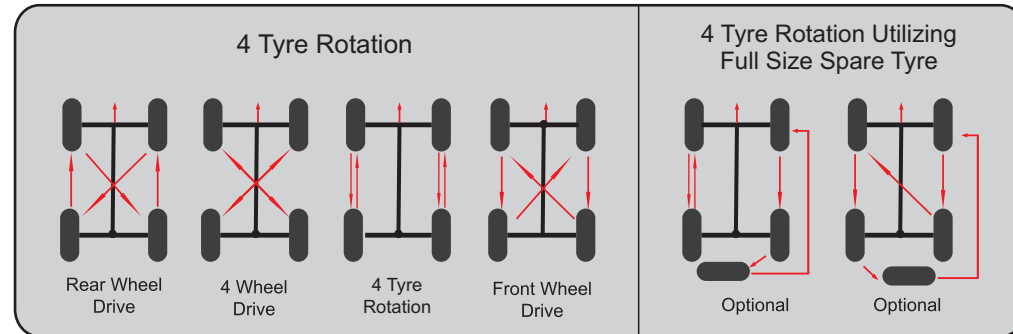

### TYRE INFLATION:

**One of the most important aspects of tyre maintenance is proper inflation.**

Sufficient inflation is needed to carry the load and avoid damage. Driving with improper inflation (particularly grossly under inflated or over inflated tyres) is dangerous and can cause critical damage or sudden failure of the tyre(s). Proper inflation should be maintained and check on at least weekly bases and before long distance drives.

**Proper inflation should be maintained and checked at least once a week and before a long distance drive.**

It is also advisable to take into account axle load and driving conditions when setting inflation pressure. Compensation for heavier loads can be made by increasing inflation pressure, but do not exceed maximum inflation for the tyre or maximum axle load.

**In the space of just one month, a tyre can lose 10 pounds of air pressure.**

It is important to check your air pressure regularly, to make sure your tyres are neither under nor over inflated.

#### Under-inflation

Is the worst enemy your tyre can have. It causes increased treadwear on the outside edges (or shoulders)of the tyre. It also generates excessive heat, which reduces tyre durability. Finally it reduces your fuel economy by increasing rolling resistance-soft tyres make your vehicle work harder.

#### Over-inflation

Is also detrimental to the tyre. Too much air pressure causes the center of the tread to bear the majority of the truck's weight, which leads to faster deterioration and uneven wear. Any kind of uneven wear will shorten the lifespan of your tyres.


## MOUNTING PROCEDURE

There is extreme danger in attempting to install a tyre of one rim diameter on a rim of a different rim diameter.

Always replace a tyre on a rim with another tyre of exactly the same diameter tyre designation and suffix letters.

For example, a 16" tyre goes with a 16" rim. Never mount a 16" size diameter tyre on a 16.5" rim. While it is possible to pass a 16" diameter tyre over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tyre bead by inflating, the tyre bead may break with explosive force and could cause serious bodily injury or death.

Rims of different diameters and tapers cannot be interchanged. The top right diagrams illustrate the difference between rims of two different tapers and diameters.

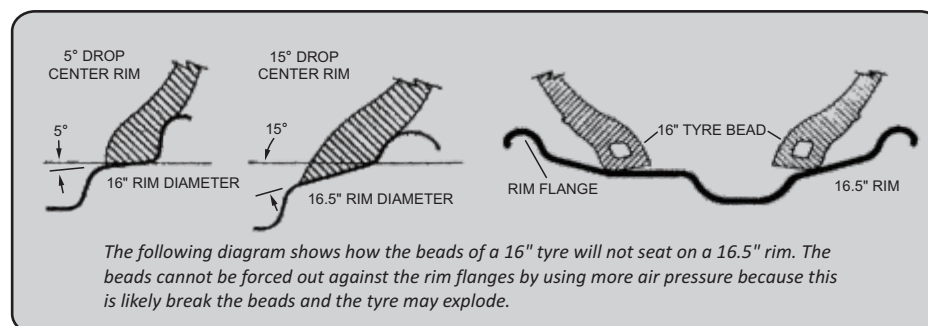

## FOR YOUR SAFETY AND COMFORT

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tyre failure may create risk of property damage or personal injury. To reduce the risk of tyre failure and for your safety and comfort, we strongly recommend the following:

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 275 kPa (2.75bar, 40psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or construction on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other outer objects stuck in the tyre treads may damage the tyre. Remove outer objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, curbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, ZC rubber recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyre should not be driven over 80km/h for the first 100km.
- When driving on winter roads, sudden starts and quick stops should be avoid and a safe car-to-car driving distance should be maintained.
- When using tyre chains be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with controlled environment.

To preserve traffic safety, ZC rubber recommends driving substantially slower under adverse weather or road conditions.

## ROUTINE MAINTENANCE

- Each month the tyre pressure should be checked one time at least when the tyre is cool, too much or less of the pressure will cause damage to tyre.
- Please take a 15-minutes break after driving on expressway for two hours.
- Please ensure that there are no nails, metal pieces, glass or other foreign materials.
- Please ensure that there is no damage such as separation, distortion and distinct rusting which will cause air leakage.
- Please transpose the tyres regularly (approximately 5000 km) in accordance with abrasion conditions for the sake of expanding its life span and preventing eccentric wear.
- No tyre brightener.

## THE INVENTORY OF STEEL-CORD RADIAL TYRE

The tyre should be placed in dry interior.

Note: In order to ensure the driving safety, we suggest that please decrease the speed while driving under atrocious weather and poor terrain condition.



**NOTES:**

Lined area for notes on page 41.

**NOTES:**

Lined area for notes on page 42.