


WEST LAKE
PREMIUM TIRES

ZC-RUBBER PRODUCT

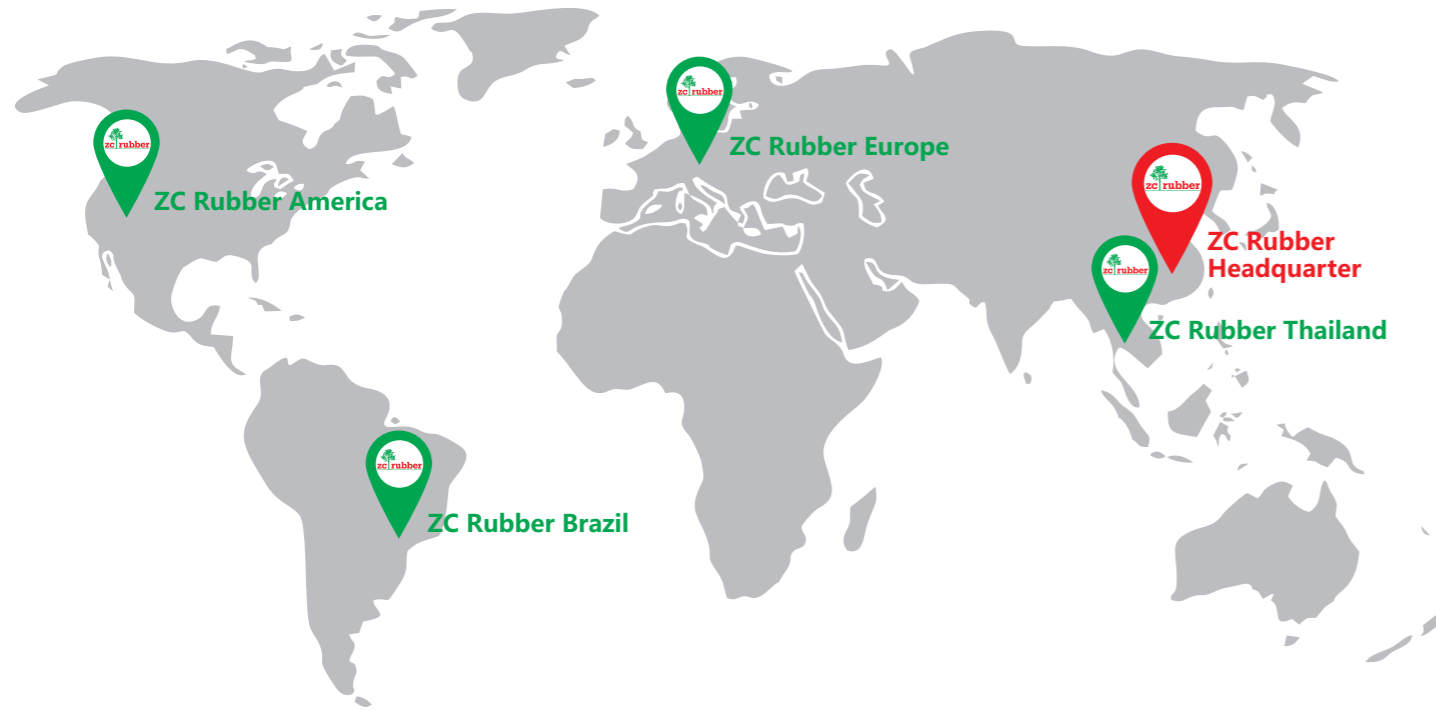

2019 TYRE CATALOGUE

ALL STEEL TRUCK & BUS RADIAL



www.zc-rubber.com




zc rubber



zc rubber



ZHONGCE RUBBER GROUP CO., LTD.

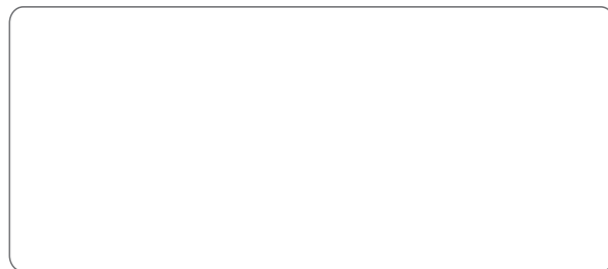

2019 TYRE CATALOGUE
ALL STEEL TRUCK & BUS RADIAL



- A Company established in Year 1958
- No. 1 Tyre Manufacturer in Mainland China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2018
- Sale revenue reached USD3.62 billion in Year 2017

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities. Meanwhile the quality control system approved by global tyre manufacturers and






international vehicle manufacturers will guarantee the safety and quality of ZC-Rubber tyres.

Today ZC-Rubber is expanding from a Chinese oriented company to a global tyre manufacturer. The subsidiaries located in Southeast Asia, North America, South America and Europe (coming soon) are serving customers without any difference of time and language. The newly established Thailand plant will produce suitable products for local and nearby markets. Safe and value will be the key supplied by ZC-Rubber, who will craft a better future together with partners and friends all over the world.





ALL STEEL TRUCK & BUS RADIAL TYRES

L		-----	07 - 18
Long Haul			
R		-----	19 - 31
Regional			
M		-----	32 - 43
Mixed Service			
U		-----	44 - 45
Urban			
W		-----	46 - 48
Winter			

ROAD		POSITION	AP/STEER	DRIVE	TRAILER
LONG HAUL			AS668 P08 AZ670 P08 CR976A P09 CR966 P10 CR960 P10	AD733 P13 AD713 P13 AD751 P13 CM335/A P14 AD757 P14	AT566 P16 AT555 P17 AT556 P17
			AS678 P11 CR989 P11 CR931 P12 AZ565 P12	AD710/A P15 CM983 P15 AD781 P16	AT559 P18 CR915 P18
REGIONAL			ES660 P20 CR950 P20 CM958 P21 CR960A P22 AZ534 P23 MZ679 P23	CM333 P26 CM961 P26 CM987/E P27 AD756 P27 CM980 P28	ET550 P30 AT560 P31
			AZ675 P23 MD752 P24 CM772 P24 CM912 P25 CR907 P25 AZ676 P31	CM985 P28 CM986 P29 CM993 P29 CM954 P30	
MIXED SERVICE	ON & OFF		AT557 P33 MD738/A P33 MD777 P34 CM913/A P34 CM923 P35	CB981 P37 CM998 P38	
	MINING		CM973 P35 CM988 P36 CM997 P36 CB999 P37 CR926/B/D/E P39		
			EZ372 P40 EZ356 P40 EZ373 P40 CB332 P41 CB972/E P41		
			CB995/A P42 CB901 P42 CB905 P43 CB919 P43		
URBAN			CR906 P45 AZ675 P45		
WINTER			NS785 P47 NZ780 P48 NZ782 P48	ND783 P47	

APPLICATION AND KEY FEATURE LEGEND



- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance



- Shorter journey with frequent braking, accelerating and turning
- Improved road grip with maximum mileage
- Exceptional tough type



- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition



- Frequent speed changes and turning
- Resistance to curb impact
- Excellent road grip and durable high mileage










L 
Long Haul



- Premium five-rib tread provides outstanding handling for steer application
- Decoupling grooves prevent uneven tread wear and ensure long tread life for long distance travelling
- Wide and deep tread guarantee longer mileage with affordable cost and remarkable value



AS668

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
				(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)			
 10.00R20	H/16	146/143K	17.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
 10.00R20	J/18	149/146J	17.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
245/70R19.5	J/18	144/142J	14.0	7.50	839	248	2750	6060	900	130	2650	5840	900	130
 11R22.5	G/14	144/142M	17.0	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
 11R22.5	H/16	148/145L	17.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
 12R22.5	J/18	152/149L	17.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
13R22.5	J/18	156/151K	18.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128
275/70R22.5	H/16	148/145L	15.0	8.25	958	276	3150	6940	900	130	2900	6395	900	130
 295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
 295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	16.5	9.00	1076	312	4125	9090	900	130	3750	8270	900	130





 Made in Thailand available



- Premium five-rib tread with various pitches to provide quiet and comfortable riding
- Stone ejection design reduces stone retention and casing penetration
- Computer aided casing design helps improve footprint for better mileage performance



AZ670

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
				(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)			
 11R22.5	G/14	144/142M	16.0	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
 11R22.5	H/16	148/145M	16.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
255/70R22.5	H/16	140/137M	15.0	7.50	930	255	2500	5510	830	120	2300	5070	830	120
 295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
 295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131

 Made in Thailand available



Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance

L



Long Haul

L



Long Haul

- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Stone ejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist treadsquirm and irregular wear forces for exceptionally long mileage



CR976A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	165K	15.0	13.00	1124	430	5150	11340	830	120	-	-	-	-
445/65R22.5	L/20	169K	15.0	13.00	1150	444	5800	12775	900	130	-	-	-	-
9.00R20	H/16	144/142K	14.5	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	146/143K	15.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	15.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	15.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	17.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
215/75R17.5	J/18	135/133J	12.5	6.00	767	211	2180	4805	850	123	2060	4540	850	123
225/70R19.5	G/14	128/126M	13.0	6.75	811	226	1800	3970	760	110	1700	3750	760	110
245/70R19.5	G/14	133/131M	13.0	7.50	839	248	2060	4540	760	110	1950	4300	760	110
245/70R19.5	H/16	136/134M	13.0	7.50	839	248	2240	4940	830	120	2120	4675	830	120
265/70R19.5	H/16	140/138M	14.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112
265/70R19.5	J/18	143/141J	14.0	7.50	867	262	2725	6005	850	123	2575	5675	850	123
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	15.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
255/70R22.5	H/16	140/137M	14.5	7.50	930	255	2500	5510	830	120	2300	5070	830	120
275/70R22.5	H/16	148/145M	14.0	8.25	958	276	3150	6940	900	130	2900	6395	900	130
275/80R22.5	H/16	149/146M	14.0	8.25	1012	276	3250	7165	850	123	3000	6610	850	123
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	16.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130

Made in Thailand available

- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Solid shoulder helps to minimize shoulder wear and improve cost per mile
- Advanced cool-running tread compounds reduces heat generated and increases irregular wear resistance resulting in higher mileage



CR966

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/55R22.5	L/20	160K(158L)	15.0	12.25	996	386	4500	9920	900	130	-	-	-	-
11R22.5	G/14	144/142M	15.0	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	15.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/60R22.5	J/18	150/147L	15.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131
315/60R22.5	J/18	152/148M	15.0	9.75	950	313	3550	7830	900	130	3150	6940	900	130
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	16.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130

Made in Thailand available

- Wider tread spreads load over a larger area, promoting long, even wear in steer and free-rolling wheel position
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads
- Decoupling tread design suitable for long-distance travelling



CR960

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130
11R24.5	G/14	146/143L	14.2	8.25	1104	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	14.2	8.25	1104	279	3250	7160	830	120	3000	6610	830	120

ZHONGCE RUBBER GROUP CO., LTD.

ALL STEEL TRUCK & BUS RADIAL TYRES

ZHONGCE RUBBER GROUP CO., LTD.

ALL STEEL TRUCK & BUS RADIAL TYRES

L



Long Haul

L



Long Haul



- Applicable for steer and free-rolling wheel position
- Five ribs with four straight grooves for precise handling
- Special designed tyre casing for better mileage and more value for customers
- Cross rib sipes provide better wet traction and reduce external noise



AS678

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142M	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	144/141L	14.2	9.00	1014	298	2800	6175	760	110	2575	5675	760	110
315/80R22.5	J/18	154/151M(156/153L)	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130
11R24.5	G/14	146/143L	14.2	8.25	1104	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	14.2	8.25	1104	279	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	144/141L	14.2	8.25	1050	283	2800	6175	760	110	2575	5675	760	110

🇹🇭 Made in Thailand available



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Decoupling tread design suitable for long-distance travelling
- Applicable for steer and free-rolling wheel position



CR989

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	144/141L	14.2	9.00	1014	298	2800	6175	760	110	2575	5675	760	110
11R24.5	G/14	146/143L	15.0	8.25	1104	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	15.0	8.25	1104	279	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	144/141L	15.0	8.25	1050	283	2800	6175	760	110	2575	5675	760	110

🇹🇭 Made in Thailand available



- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



CR931

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	165K	15.0	13.00	1124	430	5150	11340	830	120	-	-	-	-
445/65R22.5	L/20	169K	15.0	13.00	1150	444	5800	12775	900	130	-	-	-	-
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130

🇹🇭 Made in Thailand available



- Super value tyre applicable for trailer axle
- Improved tread compound and tyre casing provide superb balance between cost and performance



AZ565

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	15.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
275/70R22.5	H/16	148/145L	14.0	8.25	958	276	3150	6940	900	130	2900	6395	900	130
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/153L)	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130

L



Long Haul

L



Long Haul



- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhanced damage resistance



AD733

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12R22.5	J/18	152/149L	23.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135
305/70R22.5	L/20	151/148M(153/150L)	22.0	9.00	1018	317	3450	7610	900	130	3150	6940	900	130
295/80R22.5	H/16	150/147M	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	20.6	9.00	1050	298	3550	7830	900	131	3250	7160	900	131

Made in Thailand available



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK performer



CM335/CM335A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
495/45R22.5	L/20	169K	19.0	17.00	1018	500	5800	12800	900	130	-	-	-	-
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5(CM335A)	J/18	152/149L	20.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/60R22.5	J/18	150/147K	19.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131
315/60R22.5	J/18	152/148M	18.0	9.75	950	313	3550	7830	900	130	3150	6940	900	130
315/70R22.5	L/20	154/150L	18.0	9.00	1020	312	3750	8270	900	130	3350	7390	900	130
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130

Made in Thailand available



- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhanced damage resistance



AD713/AD751

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5(AD713)	G/14	144/142L	22.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5(AD713)	H/16	148/145L	22.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	23.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135
275/70R22.5(AD713)	H/16	148/145L	18.5	8.25	958	276	3150	6940	900	130	2900	6395	900	130
295/80R22.5(AD713)	H/16	150/147M	20.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5(AD713)	J/18	152/149M	20.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	22.5	9.00	1082	312	3750	8270	830	120	3450	7610	830	120

Made in Thailand available



- Applicable for drive wheel position on long-distance and regional transportation
- Solid close shoulder design with special tread compound for enhanced traction
- Computer designed carcass reduces pressure on road and promotes even wear
- Improved casing structure provides remarkable footprint which guarantees longer tread life



AD757

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110

Made in Thailand available

L



Long Haul

L



Long Haul



- Strong center tread blocks provide excellent all-weather traction
- Special designed tread grooves reduce stone retention for extended tyre life
- Advanced tread compound provides remarkable performance for long haul service



AD710/AD710A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11.00R20	J/18	152/149K	19.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
265/70R19.5	H/16	140/138M	16.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112
265/70R19.5	J/18	143/141J	16.0	7.50	867	262	2725	6005	850	123	2575	5675	850	123
11R22.5(AD710A)	G/14	144/142L	19.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5(AD710A)	H/16	148/145L	19.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5(AD710A)	J/18	152/149L	20.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5(AD710A)	H/16	150/147M	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5(AD710A)	J/18	152/149M	20.6	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5(AD710A)	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5(AD710A)	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130



- Premium wide base drive tyre suitable for long haul application.
- Robust tread blocks offer outstanding traction on both wet and dry road condition.
- Enhanced tyre carcass guarantees lateral stability, longer mileage and easy retreadability



AD781

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/50R22.5	L/20	161L	21.2	14.00	1018	445	4625	10200	830	120	-	-	-	-



- Wide base super single tyre applicable for both steer and trailer service
- Computer designed tread structure provide even wear with less pressure on the road
- Long life tread compound with less heating enhance the original tread life
- Strong steel belt improves the casing durability and promote multiple retreads



AT566

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/50R22.5	L/20	161L	13.1	14.00	1018	445	4625	10200	830	120	-	-	-	-



- Wide and deep tread helps to promote even wear and long tread life resulting in low cost per mile
- Solid close shoulder ribs help to improve even wear
- Three deep grooves evacuate water efficiently for traction
- Strong casing resists cuts and punctures for enhanced toughness and long casing life



CM983

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110

Made in Thailand available

L



Long Haul



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT555

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
435/50R19.5	L/20	160J(156K)	13.5	14.00	931	438	4500	9920	900	131	-	-	-	-
385/55R19.5	H/16	156J	15.0	12.25	919	386	4000	8820	900	131	-	-	-	-

Made in Thailand available



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT556

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/45R19.5	L/20	160J(156K)	14.3	15.00	895	446	4500	9920	900	131	-	-	-	-

Made in Thailand available

L



Long Haul



- Wide base with high saturation for maximum mileage efficiency
- Optimised bead construction for better durability
- Scuff resistance ribs protect sidewall from curbing and cutting



AT559

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
415/45R22.5	L/20	156K	15.5	14.00	946	416	4000	8820	800	116	-	-	-	-
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	165K	15.5	13.00	1124	430	5150	11340	830	120	-	-	-	-
445/65R22.5	L/20	169K	15.5	13.00	1150	444	5800	12775	900	130	-	-	-	-
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12R22.5	J/18	152/149L	16.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147M	15.5	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149L	15.5	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120



- Cool-running compound construction reduces the energy generated within the tread for low rolling resistance
- Shallow tread depth promotes low rolling resistance for fuel economy and long even wear
- Four wide grooves provide all-season performance on wet and dry roads



CR915

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142M	11.0	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	11.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
255/70R22.5	H/16	140/137L	11.0	7.50	930	255	2500	5510	830	120	2300	5070	830	120
295/75R22.5	G/14	144/141M	11.0	9.00	1014	298	2800	6175	760	110	2575	5675	760	110

Made in Thailand available

ZHONGCE RUBBER GROUP CO., LTD.

ALL STEEL TRUCK & BUS RADIAL TYRES

ZHONGCE RUBBER GROUP CO., LTD.

ALL STEEL TRUCK & BUS RADIAL TYRES



Regional

- Shorter journey with frequent braking, accelerating and turning
- Improved road grip with maximum mileage
- Exceptional tough type



- Premium five-rib design for regional all position application
- SILICA compound ensures better tyre life with reduced rolling resistance
- Computer aided carcass design helps improve footprint for better mileage performance



ES660



Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11.00R20	J/18	152/149K	15.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	15.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147M	16.5	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149L	16.5	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	15.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120



- Tread pattern provides extended even wear and offers excellent wet traction
- Advanced compound promotes mileage before removal for long tyre life



CR950

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	3305	770	112	1320	2910	770	112
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	3970	770	112	1600	3525	770	112
7.50R20	G/14	130/128L	13.0	6.0	935	215	1900	4190	830	120	1800	3970	830	120
8.25R20	H/16	139/137K	14.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135
8.5R17.5	F/12	121/120L	12.0	6.00	802	215	1450	3200	625	91	1400	3090	625	91
 9.5R17.5	G/14	129/127L	13.0	6.75	842	240	1850	4080	750	109	1750	3860	750	109
 9.5R17.5	H/16	143/141J	13.0	6.75	842	240	2725	6005	875	128	2575	5675	875	128
215/75R17.5	H/16	135/133J	13.0	6.00	767	211	2180	4805	850	123	2060	4540	850	123
8R22.5	G/14	130/128M	13.5	6.00	935	203	1900	4190	830	120	1800	3970	830	120
9R22.5	G/14	136/134M	14.0	6.75	974	229	2240	4940	830	120	2120	4675	830	120
10R22.5	H/16	144/142M	15.0	7.50	1019	254	2800	6175	900	130	2650	5840	900	130

 Made in Thailand available



NEW

- Wide and deep tread enhance driving stability and mileage on all kinds of roads
- Special tread compound and carcass help to guarantee long tire life and better retreadability
- Zig-zag main grooves provide superb traction level



AZ534

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
225/80R17.5	10PR	123/122L	15.8	6.75	805	226	1550	3415	700	102	1500	3305	700	102



- All wheel position applicable for long or medium distance travel
- Special tread compounding ensuring longer wear life and service life
- Improved cut resistance helping to provide better tyre performance



MD752

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12.00R24	L/20	160/157K	16.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131
315/80R22.5	J/18	154/151M(156/150L)	18.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	120



- Wide tread width offers more stable driving feel
- Innovative stone rejector reduces stone retention and maximize casing durability
- slanted groove design helps to prevent chunking



MZ679

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
305/70R19.5	J/18	146/143L	14.5	9.00	923	305	3000	6610	830	120	2725	6005	830	120



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads
- Stone rejector reduces stone retention and maximize casing durability



CM772

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
325/95R24	M/22	162/160K	20.0	9.00	1228	325	4750	10470	850	123	4500	9920	850	123



- Wide tread width offers more stable driving feel
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on regional application



AZ675

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
305/70R22.5	L/20	153/150J	19.0	9.00	1018	317	3650	8050	900	130	3350	7390	900	130




- Four ribs ensure even wear and comfortable riding
- Siped zig-zag rib helps improve traction on wet and muddy surface
- Deep circumferential grooves improves efficient water evacuation, lateral stability, and long tyre life



CM912

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12.00R24	L/20	160/157K	19.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131

 Made in Thailand available



- Improved closed shoulder helps to improved even wear resulting in long tread life
- Cross rib sipes slice through water for solid control on wet roads



CR907

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.00R15	F/12	113/109L	11.0	5.50F	750	200	1150	-	670	-	1030	-	670	-
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	-	670	-	925	-	670	-
7.00R16	G/14	118/114L	11.0	5.50F	775	200	1320	-	770	-	1180	-	770	-
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	-	770	-	1320	-	770	-



- This tyre delivers outstanding traction, long even wear and advanced casing design to ensure durability
- An extra wide, self cleaning and full depth tread design provides improved water evacuation, lateral stability
- A strong shoulder block ensures a flat even wear on all types of application with shallow lug grooves on shoulder to minimize shoulder heel and toe
- Stone ejection groove design provides a more durable casing life for retreadability by minimizing damage to the casing



CM333

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	H/16	146/143K	19.6	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	19.6	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	144/142L	19.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	19.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130

 Made in Thailand available



- Tie-barred shoulders enhance handling and help deliver even wear
- Wide tread and special block design ensure outstanding long tyre life and even wear
- Stone ejector platform helps to prevent stones from lodging in grooves and drilling into



CM961

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
12R22.5	J/18	152/149L	20.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147M	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149M	20.6	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130



- Non-directional tread design for easy operating
- Open lug design helps provide traction in wet or snowy conditions



CM987/CM987E

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	770	1600	770				
9.00R16	G/14	131/126L	15.0	6.50H	900	255	1950	4300	670	97	1700	3750	670	97
8.25R20(CM987E)	H/16	139/137K	19.0	6.5	974	236	2430	930	2300	930				
9.00R20	H/16	144/142K	16.0	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	146/143K	17.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	17.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	18.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	19.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123

Made in Thailand available



- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Aggressive traction blocks helps to increase wet traction
- Strong open shoulder produces powerful traction
- Suitable for single axle vehicles



CM980

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110

Made in Thailand available

- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Open shoulder blocks improve traction on dry and wet road surface
- High blade density of tread design helps to provide even wearing
- Suitable for single axle vehicles



CM985

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	H/16	146/143K	19.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	19.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11R22.5	G/14	144/142L	19.0	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	19.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	22.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135
315/70R22.5	L/20	154/150L	20.5	9.00	1020	312	3750	8270	900	130	3350	7390	900	130
315/80R22.5	J/18	154/151M(156/150L)	22.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	22.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130

Made in Thailand available



- Enhanced casing and deep tread guarantees longer mileage
- Strong biting edge and open shoulder produce powerful traction
- Stone rejector reduces stone retention and maximize casing durability
- Suitable for single axle vehicles



AD756

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	22.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	22.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
11R24.5	G/14	146/143L	22.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	22.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120

R



Regional



- Strong tyre carcass offers lateral durability for regional application
- Good damage protection and even wear profile feature outstanding performance in all conditions
- Excellent traction and good handling



AT560

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/65R22.5	J/18	158L(160K)	16.0	11.75	1072	389	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	160K(158L)	16.0	11.75	1072	389	4500	9920	900	130	-	-	-	-



- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



AZ676

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	2335	670	97	925	2040	670	97
7.00R16	G/14	118/114L	11.0	5.50F	775	200	1320	2910	770	112	1180	2600	770	112
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	3305	770	112	1320	2910	770	112
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	3970	770	112	1600	3525	770	112
8.25R20	H/16	139/137K	15.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135
9.00R20	H/16	144/142K	15.5	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	146/143K	16.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	16.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	17.5	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	144/142M	16.8	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145M	16.8	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149L	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120

🇹🇭 Made in Thailand available



Mixed Service

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition

M



Mixed Service
On & Off

M



Mixed Service
On & Off



- Drive axle tyre applicable for rough road service
- Durable tyre casing and wide tread enhance tyre life
- Open lug design helps deliver super traction in wet and off-road conditions



CM923

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	156/150K	20.0	9.75	1124	320	4000	8820	875	128	3350	7390	875	875
315/80R22.5	J/18	154/151M(156/150L)	20.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	830
315/80R22.5	L/20	157/154K	20.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	900

Made in Thailand available



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



CM973

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	J/18	149/146J	17.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11R24.5	G/14	146/143L	15.0	8.25	1104	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	15.0	8.25	1104	279	3250	7160	830	120	3000	6610	830	120

Made in Thailand available



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



CM988

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.00R16	G/14	118/114L	14.0	5.50F	785	200	1320	2910	770	112	1180	2600	770	112
7.50R16	G/14	122/118L	15.5	6.00G	805	215	1500	3305	770	112	1320	2910	770	112
8.25R16	H/16	128/124L	16.0	6.50H	865	235	1800	3970	770	112	1600	3525	770	112
10.00R20	H/16	146/143K	15.5	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	15.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7160	930	135
12.00R20	J/18	154/151K	17.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
215/75R17.5	H/16	135/133J	14.0	6.00	767	211	2180	4805	850	123	2060	4540	850	123
235/75R17.5	G/14	132/130M	15.0	6.75	797	233	2000	4410	775	112	1900	4190	775	112
235/75R17.5	H/16	143/141J	15.0	6.75	797	233	2725	6005	875	128	2575	5675	875	128
11R22.5	G/14	144/142L	18.5	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	18.5	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	18.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147L	18.5	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149L	18.5	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/153L)	18.5	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	18.5	9.00	1082	312	4125	9090	900	130	3750	8270	900	130

Made in Thailand available



- Rugged tread blocks and tread design offer excellent performance on mining, logging and construction sites
- Tough, high-tear compound in tread helps resist chipping and chunk



CM997

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11.00R20	J/18	152/149J	20.6	8.0	1085	293	3550	7825	930	135	3250	7160	930	135
295/80R22.5	H/16	150/147K	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149J	20.6	9.00	1050	298	3550	7830	900	131	3250	7160	900	131

Made in Thailand available

M



Mixed Service On & Off

M



Mixed Service On & Off



- Rugged tread blocks and tread design offer outstanding off-road traction
- Tough tread rubber compounds help resist chipping and chunking
- Enhanced traction in mud and sand



CB999

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	122/118M	15.0	6.00G	815	215	1500	3305	770	112	1320	2910	770	112
14.00R20	J/18	161/158K	19.5	10.00	1240	375	4625	10200	690	100	4250	9370	690	100
14.00R20	L/20	164/161J	19.5	10.00	1240	375	5000	11030	790	114	4625	10200	790	114



- Continuous central design ensures driving stability and smooth ride
- The central siped zig-zag rib ensures even wear and grip on wet and muddy surface
- Enhanced durability over rough road with good on-road performance



CB981

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	122/118L	16.0	6.00G	815	215	1500	3305	770	112	1320	2910	770	112
8.25R16	G/14	128/126L	16.5	6.50H	865	235	1800	3970	670	97	1700	3750	670	97
8.25R16	H/16	128/124L	16.5	6.50H	865	235	1800	3970	770	112	1600	3525	770	112
8.25R20	H/16	139/137K	17.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135
9.00R20	H/16	144/142K	18.0	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	146/143K	19.5	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	19.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149J	20.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	20.5	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	144/142L	19.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	19.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123

🇹🇭 Made in Thailand available



- Aggressive block design provides outstanding traction on rough roads
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Durable tyre casing for heavy loads
- Applicable for low speed use. Maximum speed shall be limited to 70 km/h in winter and 50 km/h in summer



CM998

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.00R16	G/14	118/114L	15.5	5.50F	785	200	1320	2910	770	112	1180	2600	770	112
7.50R16	G/14	122/118L	16.0	6.00G	815	215	1500	3305	770	112	1320	2910	770	112
8.25R16	G/14	128/126L	16.5	6.50H	865	235	1800	3970	670	97	1700	3750	670	97
8.25R16	H/16	128/124L	16.5	6.50H	865	235	1800	3970	770	112	1600	3525	770	112
8.25R20	H/16	139/137K	16.5	6.5	974	236	2430	5360	930	135	2300	5070	930	135
9.00R20	H/16	144/142K	17.0	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149J	19.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	20.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
12.00R20	L/20	156/153J	20.5	8.5	1125	315	4000	8820	900	131	3650	8050	900	131

🇹🇭 Made in Thailand available



- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



CR926 / CR926B / CR926D / CR926E

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	2335	670	97	925	2040	670	97
7.00R16	G/14	118/114M	11.0	5.50F	775	200	1320	2910	770	112	1180	2600	770	112
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	3305	770	112	1320	2910	770	112
8.25R16	G/14	128/126L	14.0	6.50H	855	235	1800	3970	670	97	1700	3750	670	97
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	3970	770	112	1600	3525	770	112
7.50R20	G/14	130/128L	14.0	6.0	935	215	1900	4190	830	120	1800	3970	830	120
8.25R20	H/16	139/137K	15.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135
9.00R20	H/16	144/142K	15.0	7.0	1019	259	2800	6175	900	130	2650	5840	900	130
10.00R20(CR926B/D)	H/16	146/143K	16.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20(CR926B/D)	J/18	149/146J	16.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
11.00R20(CR926B)	J/18	152/149K	17.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151K	17.5	8.5	1125	315	3750	8270	830	120	3450	7610	830	120
12.00R20	L/20	156/153J	17.5	8.5	1125	315	4000	8820	900	131	3650	8050	900	131
12.00R20	M/22	158/155F	17.5	8.5	1125	315	4250	9370	970	141	3875	8540	970	141
12.00R24	L/20	160/157K	16.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131
12.00R24(CR926B)	L/20	160/157K	19.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131
11R22.5(CR926D)	G/14	144/142M	16.8	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5(CR926D)	H/16	148/145M	16.8	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
13R22.5	J/18	156/151K	16.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128
295/80R22.5(CR926D)	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5(CR926D)	J/18	152/149L	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5(CR926B)	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5(CR926B)	L/20	157/154K	16.5	9.00	1076	312	4125	9090	900	130	3750	8270	900	130
11R24.5(CR926D)	G/14	146/143L	16.8	8.25	1104	279	3000	6610	720	105	2725	6005	720	105
11R24.5(CR926D)	H/16	149/146L	16.8	8.25	1104	279	3250	7160	830	120	3000	6610	830	120
12R24.5(CR926D)	J/18	154/154L	17.0	9.00	1147	300	3750	8270	930	135	3450	7610	930	135

🇹🇭 Made in Thailand available



- Premium logging tyres applicable for all seasons including winter season
- Large and strong tread blocks with deep tread (32/32nd) guarantee exceptional traction on snow and mud road surface
- Durable tyre casing and improved rubber compound provide excellent tyre life and resist chipping and chunking



EZ372

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142J	25.4	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145J	25.4	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
11R24.5	G/14	146/143J	25.4	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146J	25.4	8.25	1116	279	3250	7160	830	120	3000	6610	830	120



- Applicable for drive axle on unpaved road
- Robust tread block provide outstanding traction on sand and mud road surface
- Special groove design with stone ejector prevent from stone penetration
- Durable tyre carcass and improved tread compound help to resist chipping and chunking for longer tyre life



EZ356/EZ373

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
8.25R16(EZ356)	H/16	128/124J	16.0	6.50H	865	235	1800	3970	770	112	1600	3525	770	112
10.00R20(EZ373)	H/16	146/143K	19.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120
10.00R20(EZ373)	J/18	149/146J	19.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135
12.00R20(EZ356)	J/18	154/151F	24.0	8.5	1136	315	3750	8270	830	120	3450	7610	830	120
12.00R20(EZ356)	L/20	156/153C	24.0	8.5	1136	315	4000	8820	900	131	3650	8050	900	131
11R22.5(EZ373)	G/14	144/142K	23.0	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5(EZ373)	H/16	148/145K	23.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123

🇹🇭 Made in Thailand available

M



Mixed Service Mining



- Aggressive blocks provides outstanding traction on rough roads
- Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- Cool-running compound enhances toughness casing



CB905

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
8.25R16	H/16	128/124J	16.5	6.50H	865	235	1800	3970	770	112	1600	3525	770	112
10.00R20	H/16	146/143F	24.0	7.5	1065	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146D	24.0	7.5	1065	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149D	24.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151D	24.5	8.5	1136	315	3750	8270	830	120	3450	7610	830	120
295/80R22.5	H/16	150/147G	21.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149F	21.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131

Made in Thailand available



- Aggressive lug design with large block at tread center designed for mining, rock and quarry operations
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Stone ejector platform prevents trapped stones from punching deeper and piecing belt



CB919

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single			Dual				
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	H/16	146/143F	23.5	7.5	1065	278	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	149/146F	23.5	7.5	1065	278	3250	7160	930	135	3000	6610	930	135
11.00R20	J/18	152/149F	25.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	154/151F	25.5	8.5	1136	315	3750	8270	830	120	3450	7610	830	120
12.00R20	M/22	158/155C	25.5	8.5	1136	315	4250	9370	970	141	3875	8540	970	141
12.00R24	L/20	160/157C	32.0	8.5	1238	315	4500	9920	900	131	4125	9090	900	131
11R22.5	G/14	144/142G	23.0	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145J	23.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	152/149F	23.5	9.00	1096	300	3550	7830	930	135	3250	7160	930	135
13R22.5	J/18	156/151F	24.0	9.75	1136	320	4000	8820	875	128	3450	7610	875	128
295/80R22.5	H/16	150/147K	21.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149J	21.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131

Made in Thailand available



Urban

- Frequent speed changes and turning
- Resistance to curb impact
- Excellent road grip and durable high mileage



- Four rib tread pattern provides uniform wear and excellent traction on wet and dry road.
- Deep and wide tread enhances mileage for exceptionally long tyre life
- Reinforced shoulder and steel sidewall help deliver long casing life and retreadability
- Sidewall protector ribs help resist sidewall damage from turning, backing and braking when used in urban neighborhoods.
- Cool-running compound delivers low rolling resistance meaning more fuel efficiency



CR906

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142J	20.0	8.25	1065	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145J	20.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123
255/70R22.5	H/16	140/137J	17.5	7.50	936	255	2500	5510	830	120	2300	5070	830	120
275/70R22.5	H/16	148/145J(152/148F)	20.0	8.25	964	276	3150	6940	900	130	2900	6395	900	130
295/80R22.5	H/16	150/147M	19.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	152/149L	19.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131



- Excellent sidewall protection minimises scuff damage from turning and braking
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on city bus application



AZ675

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single		Dual					
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
305/70R22.5	L/20	153/150J	19.0	9.00	1018	317	3650	8050	900	130	3350	7390	900	130



Winter

W



Winter



W



Winter



- Wide and deep circumferential grooves enhances removal of snow and ice
- Specific tread compound keep rubber softness in low temperture with good performance
- Wide tread with advanced block and sipe design provides extra traction for snow and ice road conditions



NS785

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150K(152/148L)	17.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130
315/80R22.5	J/18	154/151M(156/153L)	18.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120
315/80R22.5	L/20	157/154K	18.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130



- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



NZ780

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
6.50R16	F/12	110/105L	13.5	5.50F	750	185	1060	2335	670	97	925	2040	670	97
7.00R16	G/14	118/114L	14.0	5.50F	785	200	1320	2910	770	112	1180	2600	770	112
235/75R17.5	H/16	143/141J	16.0	6.75	797	242	2725	6005	875	128	2575	5675	875	128



- Wide open shoulder deliver additional traction without compromising tread life
- Specific tread compound keep rubber softness in low temperture with good performance
- Studable tread design provides extra traction for snow and ice road conditions



ND783

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150K(152/148L)	19.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130
315/80R22.5	J/18	156/153K(154/151L)	21.0	9.00	1082	312	4000	8820	850	123	3650	8050	850	123
315/80R22.5	L/20	157/154J	21.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130



- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



NZ782

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
							Single				Dual			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	144/142L	19.6	8.25	1054	279	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	148/145L	19.6	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120

NOTE

Horizontal ruled lines for taking notes on page 49.

NOTE

Horizontal ruled lines for taking notes on page 50.